

# Trilogy: DL2700



hospital



schools



airport



retail



pharmacy



office

## Our most popular standalone pushbutton cylindrical lock

Durable electronic digital locks available  
in indoor and outdoor models

- **Grade 1 Durability.** Dependable lockset with rugged clutch mechanism, plus **vandal-proof all metal keypad.**
- **Multi-level user codes:** Master, 10 managers, 90 users, 3 service codes
- **Up to 100 different user codes** (3-5 digits)
- **100% keypad programmable** with a fingertip
- **Individual, group or total user lockout codes**
- **Easy passage mode** by manager and/or master
- **Easy to install in about an hour,** retrofits cylindrical knobsets and digital locks using slightly modified ANSI A115 Series Prep
- **Standalone battery operated;** uses 5 AA batteries
- **Key override.** All IC Core models include a large format key in knob cylinder, supporting Best, Falcon, Arrow and KSP. Other interchangeable core preps available: Yale, Medeco, Sargent, Corbin/Russwin, Schlage
- **Non-handed** for easy installation and versatility
- **2-wire remote override** or key bypass capability
- **Visual and audible entry indicators**
- **WP Models for weatherproof performance,** water-sealed for use inside and out, with operational temperature range of +151°F to -31°F (+66°C to -35°C)

*(Note: all Trilogy models are available in WP weatherproof and non-WP standard models for interior doors.)*



**ALARM LOCK**



**OPERATION:** Clutch mechanism permits turning lever without retracting latch and reduces stress on lock bodies and spindle. Outside lever free turning in locked position. Entering access code, key bypass, or remote bypass will allow lever to retract latch. Inside lever always instant egress.

**DOOR THICKNESS:** 1 5/8" to 1 7/8." Other thicknesses. Please consult Alarm Lock.

**BACKSET:** 2 3/4" Standard. 2 3/8" backset also available.

**KEYPAD:** All metal, 12 button programmable for multi-level access functions including group or individual user codes, master and management codes, passage and emergency or service code, lockout and remote override capability and allowable entry time from 5 to 20 seconds. 4 Different keypad tones and keypad may be silenced.

**STANDARD KEY OVERRIDE CYLINDERS:**

Solid brass 6 pin tumbler cylinder pinned 5, SC1 keyway, furnished in all locks. Additional tailpieces included: HW580 fits Schlage, Corbin/Ruswin CL, Sargent 480 Series, ASSA65-611. Model HW620 fits Ilco and Lori cylinders.

**INTERCHANGEABLE CORE MODELS:** Accepts 6 & 7 Pin Cylinders from: Best, Arrow, KSP, Medeco Keymark & Kaba Peaks. Also available IC Core models for Yale, Medeco, Sargent, Corbin/Ruswin CL and Schlage. Alarm Lock Tailpiece is supplied; IC Core is not included.

**LATCHBOLT:** UL Listed, fire rated, 3 hours, 1/2" throw, solid brass, deadlocking. Reversible. Adjustable front for flat or beveled doors.

**STRIKE:** 1 1/8" x 2 3/4" T strike & 1 1/4" x 4 7/8" ASA strike included. With screws for wood or metal jambs.

**LATCH FRONT:** 1 1/8" x 2 1/4" wrought brass or stainless steel.


**HANDING:** Non-handed.

**FINISHES:** US3 polished brass, US26D satin chrome, US26 polished chrome, US5 antique brass, 10B Duronodic.

**POWER:** 5 AA alkaline batteries are now rated at 120,000 cycles, supplied. Audible low battery alert, visual and audible entry indicators, unique Flex Drive<sup>®</sup> motor.

**DOOR PREP:** Standard ANSI A115 Series Prep, modified by adding additional through-bolt holes.

**COMPLIANCES:** Grade I, heavy duty cylindrical lockset, UL listed and FCC certified. ADA compliant leversets.

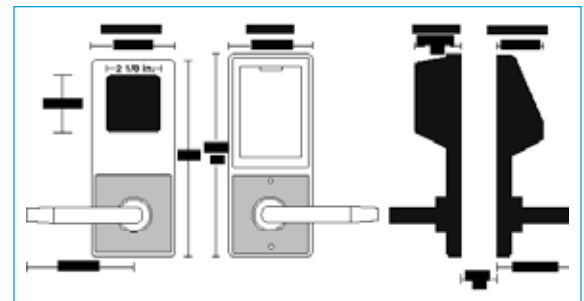

Lever set in US3  
DL2700/3



With IC Core in 26D  
DL2700iC/26D



Secure battery compartment on inside door



DL2775/26D



**FREE step-by-step online Trilogy installation seminar available 24/7 (broadband & dial-up versions).**



**ALARM LOCK**

345 Bayview Ave, Amityville, New York 11701  
1-800-ALA-LOCK • Fax 631-789-3383  
www.alarmlock.com

Trilogy is a trademark of Alarm Lock. © NAPCO 7/2005  
Patents and Patents Pending **ALA129f**

**DL 27 00 WP IC /26D -Y**

**Model & Series:**

DL27 = Trilogy T2 Series

**Trim:**

00 = Lever

50 = Knob

75 = Regal Trim Lever

**Exterior / Interior Use:**

WP = Weatherproof for exterior use

(Note: No "WP" indicates standard, interior use.)

**Cylinder:**

IC = Standard Interchangeable Core

Prep for Best, Falcon, Arrow, KSP

(Note: No "IC" indicates standard

K.O. cylinder.)

**Finish:**

/3 = US3 Polished Brass

/26 = US26 Polished Chrome

/26D = US26D Satin Chrome

/5 = US5 Antique Brass

/10B = Duronodic

**Special Order IC Prep:**

-Y = Yale

-M = Medeco

-R = Sargent

-C = Corbin/Ruswin

-S = Schlage (requires Regal Trim 75)

