

THE PIEZO BUTTON

12 TO 24 VDC
NO MOVING PARTS
ENCLOSED CIRCUITRY

TECHNICAL SPECS

VOLTAGE INPUT
12 TO 24 VDC

HOLD TIME
1 second to 40 seconds

CURRENT
LEDs ON
40 mA (Idle), 60mA (Active)

LEDs OFF
10 mA (Idle), 40mA (Active)

MATERIAL
Stainless Steel Faceplate
Plastic Transparent Light Ring


DIMENSIONS
2¾" x 4½" x 1¼"
⅜" cut corners

WEIGHT
8.0 oz (220 g)

COMPATIBILITY
Most Single Gang Boxes



COMPONENTS

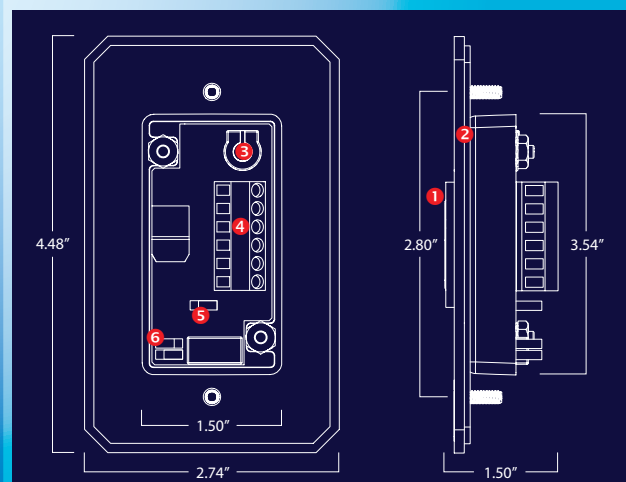

- 1 Button & LED 2 Steel Plate 3 Hold Time
4 Terminal Block 5 Safe / Secure 6 LED Control

Innovation
Quality
Service

The Piezo Button incorporates piezoelectric technology to convert physical touch (pressure) of the push button from mechanical to electrical energy.

- Status illumination can be set to red, green, or no illumination
- Selectable Fail Safe and Fail Secure options
- Hold timer lasts from as little as 1 second to as much as 40 seconds
- The Piezo button provides for a NO / NC contact
- Stainless steel construction is designed for all weather use
- Designed specifically for Request to Exit / access control applications
- Button switch life exceeds 1 billion cycles

WWW.BEASENSORS.COM

BEA Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

PHONE: 1 800.523.2462
FAX: 1 888.523.2462

BEA West
Arrow Highway Corporate Center
190 E. Arrow Hwy, Suite A
San Dimas, CA 91773-3314

PHONE: 1 800.523.2462
FAX: 1 888.523.2462

BEA Latin America
Mexico / Caribbean
190 E. Arrow Hwy, Suite A
San Dimas, CA 91773-3314

PHONE: 1 800.711.1398
FAX: 1 888.523.2462



OPEN UP NEW HORIZONS