



345 Bayview Avenue
Amityville, New York 11701
For Sales and Repairs 1-800-ALA-LOCK
For Technical Service 1-800-645-9440

(Note: Technical Service is for locksmiths and alarm professionals only)
Publicly traded on NASDAQ Symbol: NSSC

ADDENDUM TO THE 4500 SERIES INSTALLATION INSTRUCTIONS

© ALARM LOCK 2008

WI1798 12/08

Before installing the **Inside Housing Assembly**, rotate the **Cam** as follows:

1. Before installing the **Inside Housing Assembly**, be sure the deadbolt is retracted as shown.

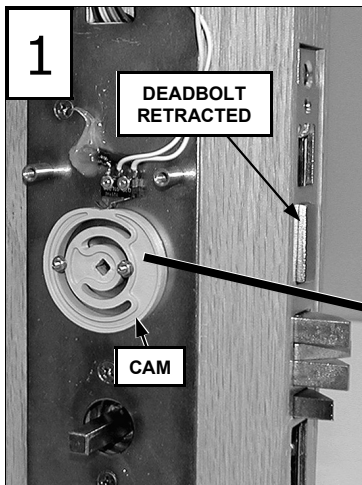


FIG. 1: CAM OVERVIEW.

2. Notice the circumference of the **Cam** is not completely round; there is a "flat spot". With the deadbolt retracted, rotate the **Cam** so that the **Leaf Switch Arm** sits in the "flat spot" of the Cam, as shown in Fig. 2.

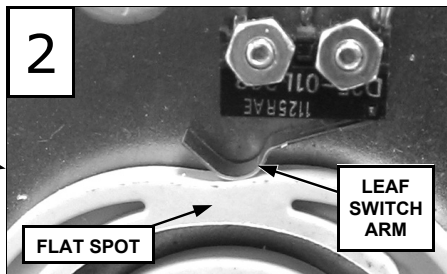


FIG. 2: CLOSE-UP OF CAM FLAT SPOT.

3. After installing the **Inside Housing Assembly**, connect the white wire and orange wire plugs (white to white and orange to orange).

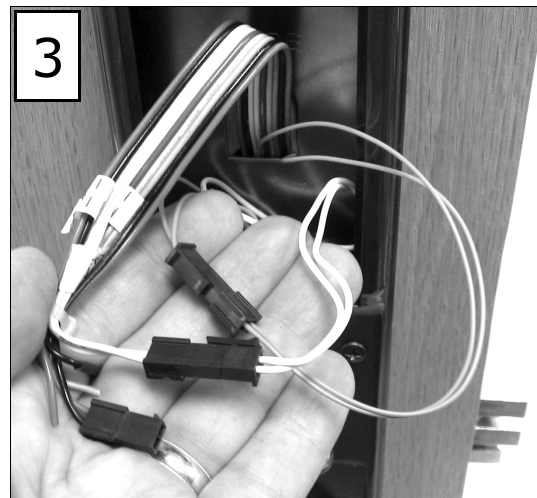


FIG. 3: CONNECT PLUGS.