

# ML2000 Series

---

## Mortise Locksets



# Overview

## ML2000

### Table of Contents

ML2000 Overview.....	2
ML2000 Features.....	3-4
ML2000 Functions.....	5-9
ML20900 ECL Applications ...	10
ML20900 ECL Features.....	12
ML20900 ECL Functions.....	13
ML20600 NAC Series Electrified Mortise Lock with High Security Monitoring.....	14
NAC Functions.....	15-16
NAC How to Order.....	17
Trim Designs.....	18-39
Muséo® Trim.....	40
Muséo® Inspire™	
Roseless Trim.....	41
Muséo® Levers.....	42-54
Vineyard™ Collection Trim.....	55-57
High Security Trim (HS).....	58
Vandal Resistant Trim (VR).....	59
Behavioral Health Trim (BHSS).....	60
Behavioral Health Lever Trim (BLSS).....	61
Push/Pull Trim (HPSK).....	62
Anti-Harm Trim (HSS).....	63
Options and Accessories....	64-72
How to Order.....	73-75
Quick Codes.....	76-78
How to Specify.....	79-81
Reversing Handing.....	82

[www.corbinrusswin.com](http://www.corbinrusswin.com)

### Quality

The ML2000 series is a Grade 1 mortise lock designed to meet the rigors of high-traffic commercial, institutional, industrial and government applications. Constructed of heavy-gauge steel, the lockbody features our patented Quick Reversible latchbolt, and a 1" stainless steel deadbolt. A wide variety of trim designs and functions and a 10-year warranty lend to the ML2000's versatility and reliability, making it the ideal choice for use in offices, schools, hospitals, hotels and other high-use applications.

### Security

Further discourage intrusion and abuse with the ML2000HS (High Security) or ML2000VR (Vandal Resistant) series mortise lock. Both locks feature vandal-resistant stainless steel escutcheons with tapered edges and Torx® pin tamper resistant screws. When matched with Corbin Russwin patented high-security cylinders, any door can become a formidable barrier to intruders.

### Aesthetics

Complement any application with the full range of trim designs and finishes offered with ML2000 Series. From stainless steel security trims to bright brass Vineyard™ levers, design continuum can be achieved without forfeiting aesthetics. For additional information regarding designer trim, see the Corbin Russwin Vineyard™ Collection and Muséo® Collection catalogs.

### Key Advantages

- Patented Quick Reversible feature enables reversal of hands without disassembling the lock case (Patent # 6,349,982)
- Security trims provide a vandal-resistant barrier
- Can be used with new or existing Corbin Russwin key systems. Also accepts cylinders of most other manufacturers.
- Provides life safety and security in a single door prep, saving the additional cost of a deadlock
- Through-bolted trim designs for proper alignment and increased security

### Features

#### Handing

Handed; quick reversible. The lockset can be re-handed without disassembling the lock case; see page 73.

#### Door Thickness

1-3/4" (44mm) standard.  
Optional door thicknesses available; see Quick Codes, page 77.

#### Backset

2-3/4" (70mm).

#### Lockcase

Heavy-gauge steel, 5-7/8" (149mm) x 4" (102mm) x 15/16" (24mm).  
Optional: non-ferrous lockcase for corrosion resistance; see Quick Codes, page 77.

#### Front

Heavy-gauge steel, 8" (203mm) x 1-1/4" (32mm) x -3/32" (2mm). Accommodates flat doors and doors beveled 1/8" (3mm) in 2" (51mm). Furnished 1-1/16" (27mm), optional D138, wide for 1-3/8" (35mm) doors.

#### Armored Front

Wrought brass, bronze or stainless steel attached by machine screws to lockcase front. ML2000HS & ML2000VR utilizes security Torx® screws.

#### Latchbolt

2-piece mechanical with anti-friction insert, 5/8" (16mm) x 1" (25mm) x 3/4" (19mm) throw.

#### Auxiliary Latchbolt

9/16" (14mm) effective throw and 3/8" (10mm) effective auxiliary latch deadlocking.

#### Deadbolt

One-piece stainless steel, 19/32" (15mm) x 1-1/4" (32mm) x 1" (25mm) throw.

#### Occupancy Indicator

Occupancy indicators for use with ML2000 x sectional trim. Design features option for dual indicators on double cylinder functions, confirming door is secured from either side. Emergency override standard for all non-keyed functions.

#### Hub

- Knob: stainless steel, 9/32" (7mm) x 9/32" (7mm). (HS) 3/8" (10mm) stainless steel.
- Lever: steel, 5/16" (8mm). (Including (VR))

#### Spacing

C. to c. knob/lever to cylinder: 3-5/8" (92mm).  
C. to c. knob/lever to thumbturn: 2-7/16" (62mm).

#### Strike

Wrought brass, bronze or stainless steel, ANSI straight lip standard, 4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/8" (29mm) lip to center. Optional strikes, lip lengths and ANSI wrought strike box available; see Quick Codes, page 77.

#### Cylinder

Brass, 6-pin, L4 keyway, 0-bitted standard.  
Brass, fixed 6-pin conventional fixed core cylinder, L4 keyway standard for ML2000HS.  
Optional cylinders available; see Quick Codes, page 76.

#### Keys

Two nickel silver standard.

#### Keying Features Available

Master keying  
Construction master keying  
Visual key control  
Concealed key control  
Plug only to show (concealed shell)  
7-pin cylinder  
Security cylinder  
Access 3® cylinder  
Pyramid cylinder  
Interchangeable core (IC)  
Security IC  
Pyramid IC  
Access 3® IC  
Master ring cylinder  
Blockout cylinder  
Flex head cylinder

#### Warranty

Ten-year limited.

### Certification/Compliance

#### ANSI/BHMA

Certified A156.13 Series 1000, Operational and Security Grade 1. Meets A117.1 Accessibility Code.



#### Federal

Meets FF-H-106C.

#### UL/cUL-UL10C Positive Pressure

All locks listed for A label and lesser class doors, 4' (122cm) x 10' (305cm) single or 8' (244cm) x 10' (305cm) pair (3 hour fire door). Letter F and UL symbol on armored front indicate listing.

Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Corbin Russwin, Inc. makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire-rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

#### California State Reference Code

(Formerly Title 19, California State Fire Marshal Standard)

All levers with returns, return to within 1/2" (13mm) of door face.

#### Windstorm/Hurricane

Certified (refer to local codes).

(HS) Indicates ML2000HS (High Security) availability.

(VR) Indicates ML2000VR (Vandal Resistant) availability.

# Features

## ML2000

### Finishes

ANSI/BHMA 605 (US3)	(HS)	Bright Brass
ANSI/BHMA 606 (US4)	(HS)	Satin Brass
ANSI/BHMA 611 (US9)	(HS)	Bright Bronze
ANSI/BHMA 612 (US10)	(HS)	Satin Bronze
ANSI/BHMA 613 (US10B)	(HS)	Oxidized Bronze, oil rubbed
613E (US10BE)		Dark Oxidized Satin Bronze - Equivalent
613L		Dark Oxidized Satin Bronze, Clear Coated
ANSI/BHMA 618 (US14)		Bright Nickel Plated
ANSI/BHMA 619 (US15)	(HS)	Satin Nickel Plated
ANSI/BHMA 625 (US26)	(HS)	Bright Chromium Plated
ANSI/BHMA 626 (US26D)	(HS)	Satin Chromium Plated
626C		Satin Chromium Plated with MicroShield®
ANSI/BHMA 629 (US32)	(VR)	Bright Stainless Steel
ANSI/BHMA 630 (US32D)	(VR)	Satin Stainless Steel
630C	(HS)	Satin Stainless Steel with MicroShield®
ANSI/BHMA 722		Black Oxidized Bronze, oil rubbed



Armored front conceals lock mounting screws and one-piece heavy-gauge steel front


Patented latchtail enables easy handing changes (Patent # 6,349,982)

Heavy-gauge internal parts provide security, reliability, and durability

Deadbolt at 1" throw will project further than latchbolt at 3/4" throw

1" throw, one-piece deadbolt meets security Grade 1

Heavy-duty 3/4" throw latchbolt with stainless steel insert provides positive secure latching

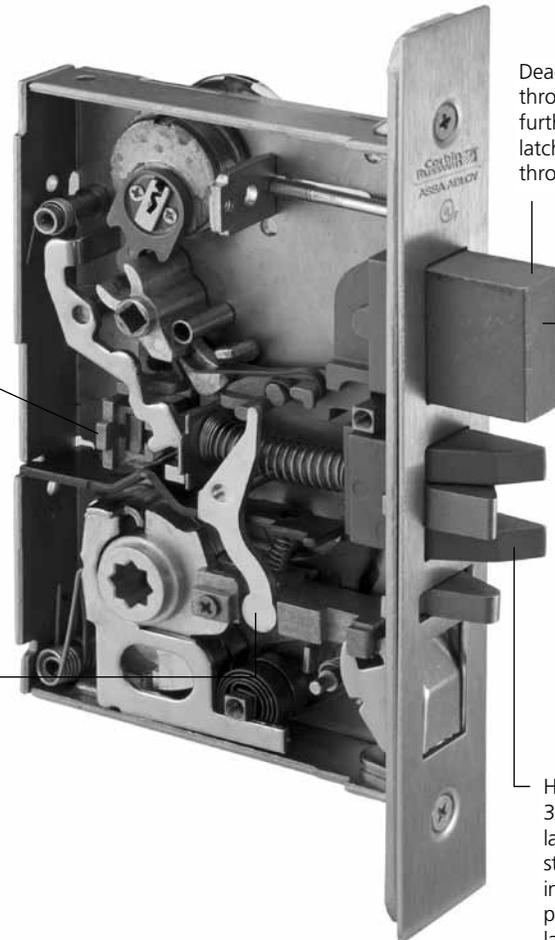

(HS) Indicates ML2000HS (High Security) availability.

(VR) Indicates ML2000VR (Vandal Resistant) availability.

Outside	Inside	Series/Function	Type	ANSI No.	Function Description
 A01	 A01	ML2002 	Classroom Intruder		<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless outside grip is locked by key either side.</li> <li>Outside grip locked or unlocked by cylinder either side.</li> <li>Auxiliary latch deadlocks latchbolt.</li> <li>Inside grip always free.</li> </ul>
 A01	 A01	ML2003 	Classroom		<ul style="list-style-type: none"> <li>Lock or unlock outside grip by key.</li> <li>Latchbolt by grip either side, unless outside grip is locked.</li> <li>Inside grip always free.</li> <li>Auxiliary latch deadlocks latch.</li> </ul>
		ML2010   	Passage or Closet	F01	<ul style="list-style-type: none"> <li>Latchbolt by grip either side.</li> <li>Both grips always free.</li> </ul>
 A01	 A01	ML2011  	Deadlock	F18	<ul style="list-style-type: none"> <li>Deadbolt by key outside.</li> <li>No inside operation.</li> </ul>
 A01	 A01	ML2012 	Deadlock	F16	<ul style="list-style-type: none"> <li>Deadbolt by key either side.</li> </ul>
 A01	 A01	ML2013 	Deadlock	F17	<ul style="list-style-type: none"> <li>Deadbolt by key outside or by thumbturn grip inside.</li> </ul>
 A01	 A01	ML2017 	Classroom Deadlock	F29	<ul style="list-style-type: none"> <li>Deadbolt by key outside.</li> <li>Thumbturn grip inside retracts deadbolt only; will not project deadbolt.</li> </ul>
 A01	 A01	ML2020   	Privacy Bedroom or Bathroom	F02	<ul style="list-style-type: none"> <li>Latchbolt by grip* either side, when deadbolt is retracted.</li> <li>Deadbolt by thumbturn grip inside or by emergency release tool outside.</li> <li>No simultaneous deadbolt and latch retraction</li> <li>Non-panic release</li> <li>Not available with M19S or M19SN</li> </ul>

 Indicates Indicator option is available

 Indicates Indicator option is available

\* When lever handles are furnished, both outside and inside are locked when deadbolt is projected.

 Indicates function availability in ML2000HS.

 Indicates function available in Vandal Resistant Trim.

 Indicates function available in Anti-Harm Trim

# Functions

## ML2000

Outside	Inside	Series/Function	Type	ANSI No.	Function Description
 A01	 A01	ML2022 (HS) (VR) (HSS)	Store Door	F14	<ul style="list-style-type: none"> <li>Latchbolt by grip* either side when deadbolt is retracted.</li> <li>Deadbolt by key either side.</li> <li>Non-panic release.</li> <li>No simultaneous deadbolt and latch retraction</li> </ul>
 A01	 A01	ML2024 (HS) (VR) (HSS)	Entrance or Storeroom	F21	<ul style="list-style-type: none"> <li>Latchbolt by grip* either side when deadbolt is retracted.</li> <li>Deadbolt by key outside or by thumbturn grip inside.</li> <li>Non-panic release.</li> <li>No simultaneous deadbolt and latch retraction</li> </ul>
 A01 (Hotel Cylinder)	 A01	ML2029 (VR)	Hotel or Motel	F15	<ul style="list-style-type: none"> <li>Latchbolt by grip inside and by guest key or master key outside.</li> <li>Outside grip always rigid.</li> <li>Deadbolt by thumbturn grip inside or by emergency key outside.</li> <li>Inside grip simultaneously retracts latchbolt and deadbolt.</li> <li>Emergency key shuts out all other keys.</li> <li>Auxiliary latch deadlocks latchbolt.</li> </ul> <p>Note: Indicator shows deadbolt position only</p>
 A01 (Hotel Cylinder)	 A01	ML2029HS (HS)	Hotel or Motel	—	<ul style="list-style-type: none"> <li>Latchbolt by grip inside and by guest key or master key outside.</li> <li>Outside grip always rigid.</li> <li>Emergency key throws deadbolt, shutting out all other keys and preventing exit from inside.</li> <li>Auxiliary latch deadlocks latchbolt.</li> </ul> <p>Note: Indicator shows deadbolt position only</p>
 A01	 A01	ML2030 (HS) (VR)	Privacy Bedroom or Bathroom	F19	<ul style="list-style-type: none"> <li>Latchbolt by grip either side unless outside grip locked by thumbturn</li> <li>Deadbolt by thumbturn grip inside or by emergency release tool outside.</li> <li>Inside grip simultaneously retracts latchbolt and deadbolt and unlocks outside grip.</li> <li>Not available with M19S or M19SN</li> </ul>
 A01	 A01	ML2032 (HS) (VR) (HSS)	Institution or Utility	F30	<ul style="list-style-type: none"> <li>Latchbolt by key either side.</li> <li>Both grips always rigid.</li> <li>Auxiliary latch deadlocks latchbolt.</li> </ul> <p>Note: This function does not allow free egress and can pose a life safety hazard in event of an emergency. Installation should be in accordance with approved codes only.</p>
 A01	 A02	ML2042 (HS) (VR) (HSS)	Entrance or Public Restroom	F09	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless outside grip is locked by key from inside.</li> <li>Latchbolt by key outside when outside grip is locked.</li> <li>Auxiliary latch deadlocks latchbolt.</li> <li>Inside grip always free.</li> </ul>
 A01	 A01	ML2048 (HS) (VR)	Entrance or Apartment	F08 F10	<ul style="list-style-type: none"> <li>Latchbolt* by key outside or by grip either side, unless outside grip is locked by toggle-action stop.</li> <li>Deadbolt by key outside or by thumbturn grip inside.</li> <li>Inside grip free when deadbolt is retracted.</li> <li>Non-panic release.</li> <li>No simultaneous deadbolt and latch retraction</li> </ul> <p>Note: Indicator shows deadbolt position only</p>
		ML2050	Half Dummy Trim	—	<ul style="list-style-type: none"> <li>Grip acts as pull only; no operation.</li> </ul>

\* When lever handles are furnished, both outside and inside are locked when deadbolt is projected.

 Indicates Indicator option is available

(HS) Indicates function availability in ML2000HS.

 Indicates Indicator option is available









(VR) Indicates function available in Vandal Resistant Trim.

(HSS) Indicates function available in Anti-Harm Trim.

 Indicates rigid grip.

ML2000.6

ASSA ABLOY, the global leader in door opening solutions

Outside	Inside	Series/Function	Type	ANSI No.	Function Description
 A01		ML2051 (HS) (VR) (HSS)	Entrance or Office	F04	<ul style="list-style-type: none"> <li>Latchbolt by key when outside grip locked by toggle action stop.</li> <li>Latchbolt by grip either side, unless outside grip is locked by toggle-action stop.</li> <li>Auxiliary latch deadlocks latchbolt.</li> <li>Inside grip always free.</li> </ul>
 A02	 A02	ML2052 (HSS)	Classroom Intruder	F32	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless outside grip is locked by key either side.</li> <li>Latchbolt by key when outside grip locked.</li> <li>Auxiliary latch deadlocks latchbolt.</li> <li>Inside grip always free.</li> <li>Outside grip remains locked unless unlocked by key either side.</li> </ul> <p>Note: Not available with indicator, specify ML2002.</p>
 A02		ML2053 (HSS)	Entrance or Office	—	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless outside grip is locked or unlocked by key or thumbturn.</li> <li>Unlocked by key or thumbturn.</li> <li>Outside grip locked or unlocked by key or thumbturn.</li> <li>Latchbolt by key when outside grip locked.</li> <li>Auxiliary latch deadlocks latchbolt.</li> <li>Inside grip always free.</li> </ul>
 A01		ML2054 (HSS)	Entrance or Office	F04	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless outside grip is locked.</li> <li>Outside grip locked or unlocked by thumbturn.</li> <li>Latchbolt by key when outside grip locked.</li> <li>Auxiliary latch deadlocks latchbolt.</li> <li>Inside grip always free.</li> </ul>
 A02		ML2055 (HS) (VR) (HSS)	Classroom	F05	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless outside grip is locked by key outside</li> <li>Latchbolt by key when outside grip locked</li> <li>Auxiliary latch deadlocks latchbolt</li> <li>Inside grip always free</li> <li>Outside grip remains locked unless unlocked by key</li> </ul> <p>Note: Not available with indicator, specify ML2003</p>
 A02		ML2056 (HSS)	Classroom Holdback	F06	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless outside grip is locked or unlocked by key.</li> <li>Latchbolt by key outside when outside grip is locked.</li> <li>Latchbolt can be held in a retracted position by key, or released by key.</li> <li>Auxiliary latch deadlocks latchbolt.</li> <li>Inside grip always free.</li> </ul> <p>Note: Not approved for use on U.L. fire listed applications.</p>
 A01		ML2057 (HS) (VR) (HSS)	Storeroom or Closet	F07	<ul style="list-style-type: none"> <li>Latchbolt by grip inside or by key outside.</li> <li>Outside grip always rigid.</li> <li>Auxiliary latch deadlocks latchbolt.</li> <li>Inside grip always free.</li> </ul>
 A02		ML2058 (HSS)	Entrance or Office Holdback	—	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless outside grip is locked.</li> <li>Outside grip locked or unlocked by key or thumbturn.</li> <li>Latchbolt retracted by key outside when outside grip is locked.</li> <li>Latchbolt can be held in a retracted position by key or thumbturn, or released by key or thumbturn.</li> <li>Auxiliary latch deadlocks latchbolt.</li> <li>Inside grip always free.</li> </ul> <p>Note: Not approved for use on U.L. fire listed applications.</p>











(HS) Indicates function availability in ML2000HS.

(VR) Indicates function available in Vandal Resistant Trim.

(HSS) Indicates function available in Anti-Harm Trim.

# Functions

## ML2000

Outside	Inside	Series/Function	Type	ANSI No.	Function Description
 A01 	 	ML2059	Security Storeroom or Closet	—	<ul style="list-style-type: none"> <li>Latchbolt and deadbolt by grip inside or by key outside</li> <li>Inside grip simultaneously retracts deadbolt &amp; latchbolt</li> <li>Outside grip always rigid</li> <li>Auxiliary latch deadlocks latchbolt</li> <li>Inside grip always free</li> </ul> Note: Indicator shows deadbolt position only
 	 	ML2060 (HSS)	Privacy	F22	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, except when outside grip is locked by thumbturn inside.</li> <li>Operating inside grip, closing door or operating emergency key outside unlocks outside grip.</li> <li>Inside grip always free.</li> <li>Not available with M19S or M19SN</li> </ul>
 A01 	  A01 	ML2062	Intruder Deadbolt	F33	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless outside grip is locked by projection of deadbolt</li> <li>Deadbolt thrown or retracted by key from either side</li> <li>Inside grip simultaneously retracts latchbolt and deadbolt and unlocks outside grip</li> <li>Inside grip always free</li> </ul>
 A01 	 	ML2065 (HS) (VR)	Dormitory or Entrance	F13	<ul style="list-style-type: none"> <li>Latchbolt by grip either side unless outside grip locked by projection of deadbolt.</li> <li>Deadbolt thrown or retracted by key outside or by thumbturn grip inside.</li> <li>Inside grip simultaneously retracts latchbolt and deadbolt and unlocks outside grip.</li> <li>Inside grip always free.</li> </ul>
 A01 	 	ML2067 (HS) (VR)	Apartment or Dormitory	F20	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless outside grip is locked by toggle-action stop or by projection of deadbolt.</li> <li>Deadbolt thrown or retracted by key outside or by thumbturn grip inside.</li> <li>Inside grip simultaneously retracts latchbolt and deadbolt; outside grip remains locked.</li> <li>Auxiliary latch deadlocks latchbolt.</li> <li>Outside grip unlocked by toggle-action stop</li> </ul> Note: Occupancy Indicator shows deadbolt position only
 A01 	 	ML2068 (HSS)	Privacy or Apartment		<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless outside grip is locked</li> <li>Outside grip locked or unlocked by key or thumbturn</li> <li>Operating inside grip, closing the door or using key unlocks outside grip</li> <li>Inside grip always free</li> <li>Auxiliary latch deadlocks latch</li> </ul>
 A02 	 	ML2069 (HSS)	Institutional Privacy	F26	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, except when outside is locked by thumbturn inside.</li> <li>Operating inside grip or closing door unlocks outside grip.</li> <li>Key outside retracts latch at all times, even if thumbturn is held in locked position.</li> <li>Auxiliary latch deadlocks latchbolt.</li> </ul>
		ML2070	Full Dummy Trim	—	<ul style="list-style-type: none"> <li>Grips act as pulls only; no operation.</li> </ul>

 Indicates Occupancy Indicator option is available

(HS) Indicates function availability in ML2000HS.








(VR) Indicates function available in Vandal Resistant Trim.

 Indicates Indicator option is available

(HSS) Indicates function available in Anti-Harm Trim.

 Indicates rigid grip.

ML2000.8

Outside	Inside	Series/Function	Type	ANSI No.	Function Description
 A01	 A01	ML2072 (HS) (VR)	Classroom Intruder	—	<ul style="list-style-type: none"> <li>Latchbolt by grip from either side unless outside grip is locked by projection of deadbolt</li> <li>Deadbolt thrown or retracted by key from either side</li> <li>Inside grip simultaneously retracts latchbolt and deadbolt; outside grip remains locked</li> <li>Key either side unlocks outside grip; outside grip remains locked unless unlocked by key</li> <li>Auxiliary latch deadlocks latchbolt</li> </ul> Note: Indicator shows deadbolt position only
 A01	 A01	ML2073 (HS) (VR)	Classroom Security	—	<ul style="list-style-type: none"> <li>Latchbolt by grip from either side unless outside grip is locked by projection of deadbolt</li> <li>Deadbolt thrown or retracted by key</li> <li>Inside grip simultaneously retracts latchbolt and deadbolt; outside grip remains locked</li> <li>Key unlocks outside grip; outside grip remains locked unless unlocked by key</li> <li>Auxiliary latch deadlocks latchbolt</li> </ul> Note: Indicator shows deadbolt position only
 A01	 A01	ML2075 (HS) (VR)	Security Entrance or Office	—	<ul style="list-style-type: none"> <li>Latchbolt by grip from either side unless outside grip is locked by projection of deadbolt</li> <li>Deadbolt thrown or retracted by outside key or inside thumbturn</li> <li>Inside grip simultaneously retracts latchbolt and deadbolt; outside grip remains locked</li> <li>Key unlocks outside grip; outside grip remains locked unless unlocked by key</li> <li>Auxiliary latch deadlocks latchbolt</li> </ul> Note: Indicator shows deadbolt position only
		ML2080	Half Active Dummy Trim	—	<ul style="list-style-type: none"> <li>Non-latching operation</li> <li>Grip always active; acts as push or pull only</li> </ul>
 A01	 A01	ML2082 (HS) (VR)	Dormitory or Exit	F11	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless outside grip is locked by toggle-action stop or by projection of deadbolt</li> <li>Deadbolt thrown by key from either side</li> <li>Deadbolt and latchbolt retracted by outside key when outside grip locked</li> <li>Outside grip unlocked by toggle-action stop</li> <li>Inside grip simultaneously retracts latchbolt and deadbolt; outside grip remains locked</li> </ul> Note: Indicator shows deadbolt position only
		ML2090 (HSS)	Full Active Dummy Trim	—	<ul style="list-style-type: none"> <li>Non-latching operation</li> <li>Both grips always active; acts as push or pulls only</li> </ul>
 A01	 A01	ML2092 (HS) (VR) (HSS)	Security Institution or Utility	—	<ul style="list-style-type: none"> <li>Latchbolt by key either side</li> <li>Deadbolt thrown and retracted by key either side</li> <li>Auxiliary latch deadlocks latchbolt</li> <li>Inside and outside grips remain locked at all times</li> </ul> Note: Indicator shows deadbolt position only Note: This function does not allow free egress and can pose a life safety hazard in event of an emergency. Installation should be in accordance with approved codes only.



Indicates rigid grip.



Indicates Indicator option is available



Indicates function availability in ML2000HS.



Indicates function available in Vandal Resistant Trim.



Indicates function available in Anti-Harm Trim.

# Applications

## ML20900 ECL

### ML20900 ECL Series Electrified Mortise Lockset

#### Simplicity

Combine simplicity and access control with the Corbin Russwin ML20900 ECL series electrically controlled mortise lock. Utilizing the proven ML2000 Series mortise lockset with the patented quick reversible latchbolt, the ML20900 series provides remote locking and unlocking. The electrified lock can be installed in a standard mortise prep with slight modification by door manufacturer. The ML20900 ECL is ideal for use where increased security is necessary at all times, such as tenant space, pharmacies, computer rooms, and high security areas.

#### Security

In applications where increased security is required, look no further than the ML2000VR Vandal Resistant Trim. This cast stainless steel trim features tapered edges, double through bolts, torx-pin tamper resistant screws and the lever remains attached to the escutcheon when the spindle is broken.


#### Aesthetics

Access control doesn't mean a loss of visual appeal. The Vineyard™ Collection and the Muséo® Collection feature beautifully designed levers, perfect for high-profile applications where pleasing aesthetics is a must.

#### Additional Features

- Mechanical key override
- Patented Quick Reversible latchbolt, Patent # 6,349,982

### Typical Application

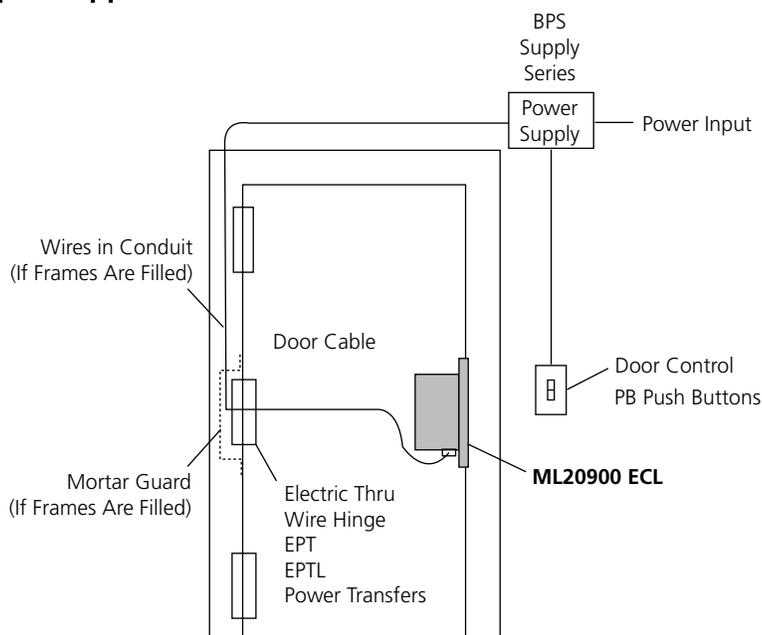

#### Featuring EcoFlex™ Technology\*:


- Reduces energy consumption up to 96%, as certified by GreenCircle
  - Lower operating costs
  - Assists with load reduction in optimizing energy performance credit in LEED
  - Reduces number of power supplies required
- Field configurable to fail-safe or fail-secure
- Operates from 12-24VDC, offering greater flexibility in system design
- Innovative actuator design provides superior reliability
  - Higher performance and reduced maintenance
  - Ability to have longer cable runs without negatively impacting lock function
  - Reduces risk of voltage drops and eliminates inductive kickback
  - Lower total cost of ownership

\* Patent Pending

# Typical System Components (For Reference Only)

## ML20900 ECL


### Tower Stairwell

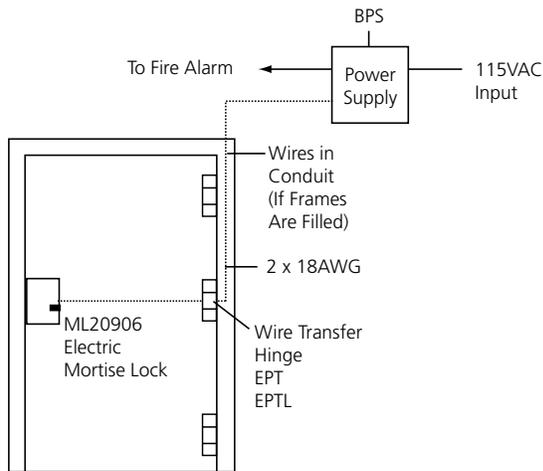

**Operation:**

Free egress at all times. Door is locked at all times preventing entry from the stairwell to a floor. Fire alarm activation will allow re-entry from the stairwell to the floor. Power failure will allow re-entry from the stairwell to the floor.


### Access Control on Employee Entrance

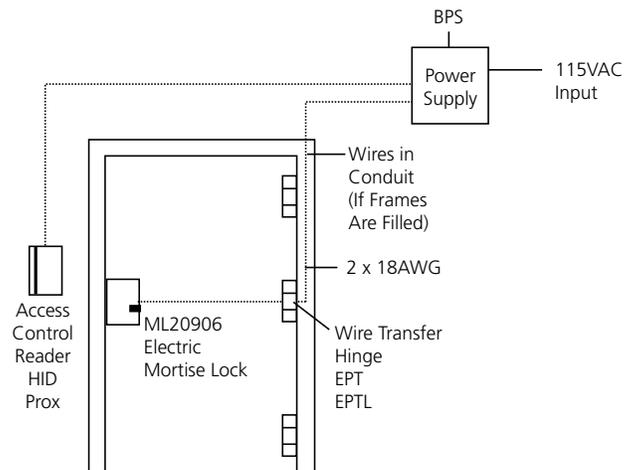

**Operation:**

Free egress at all times. Door is locked at all times preventing unauthorized entry. Authorized entry is permitted by presenting a valid user card.

### Controlled Entry With Alarm

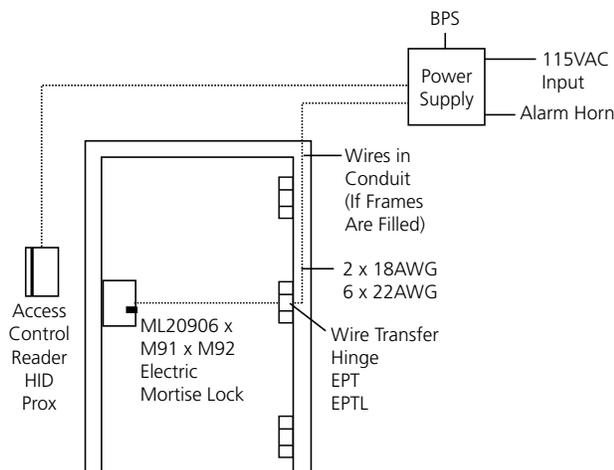

**Operation:**

Free egress at all times. User exits through the door which triggers the M92 switch which shunts the alarm. Door is locked at all times preventing unauthorized entry. Authorized entry is permitted by presenting a valid user card. Forced entry will trigger M91 switch and activate alarm. Alarm is deactivated by a valid user card.




ElectroLynx®, a system of universal Molex® plug-in connectors and standardized color-coded wiring, makes installing electrified doorway components a snap!




### Lock Schematics


#### Power Leads

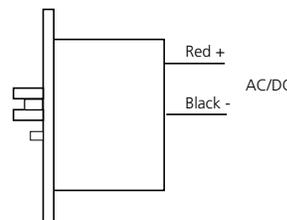


#### Power Leads x M92 (Request to Exit)

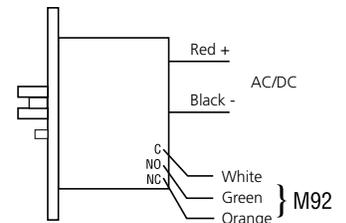

#### Power Leads x M91 (Latchbolt Monitor)



#### Power Leads x M105 (Security Monitor)



Consult factory for electrical system layouts, riser and wiring diagrams.

# Features

## ML20900 ECL

### Features

#### Handing

Handed; quick reversible. The lockset can be re-handed without disassembling the lockcase.

#### Door Thickness

1-3/4" (44mm) standard. Optional door thicknesses available; see Quick Codes, page 70.

#### Backset

2-3/4" (70mm).

#### Lockcase

Heavy-gauge steel, 5-7/8" (149mm) x 4" (102mm) x 15/16" (24mm).

#### Front

Heavy gauge steel, 8" (203mm) x 1-1/4" (32mm) x 3/32" (2mm). Accommodates flat doors and doors beveled 1/8" (3mm) in 2" (51mm).

#### Armored Front

Wrought brass, bronze or stainless steel attached by machine screws to lockcase front.

#### Latchbolt

2-piece mechanical anti-friction insert, 5/8" (16mm) x 1" (25mm) x 3/4" (19mm) throw.

#### Auxiliary Latchbolt

9/16" (14mm) effective throw and 3/8" (10mm) effective auxiliary latch deadlocking.

#### Hub

- Knob: stainless steel, 9/32" (7mm) x 9/32" (7mm).
- Lever: steel, 5/16" (8mm). (Including )
-  3/8" (10mm) stainless steel.

#### Spacing

C. to c. knob/lever to cylinder: 3-5/8" (92mm)

C. to c. knob/lever to thumbturn: 2-7/16" (62mm).

#### Strike

Wrought brass, bronze or stainless steel ANSI straight lip standard, 4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/8" (29mm) lip to center. Optional strikes, lip lengths and ANSI wrought strike box available; see Quick Codes, page 70.

#### Trim

Available with all ML2000 Series trim designs including the Vineyard™ Collection and the Muséo® Collection. See pages 40-57.

#### Cylinder

Brass, 6-pin, L4 keyway, 0-bitted standard. Optional cylinders available; see Quick Codes, page 69.

#### Keys

Two nickel silver standard.

#### Warranty

Ten-year limited warranty on ML2000 mortise lockset. Two-year limited warranty on electronic components.

#### Electrical Specifications (Fail Safe/Fail Secure)

12/24VDC @ 15mA Continuous

12/24VDC Peak current draw = .5A

(Maximum of 2 locks per 1A Power Supply)

Monitor Switch Rating: 2 amp @ 24VDC

Note: Operating voltage not to exceed +/- 10%.

See Quick Codes, page 71.

#### Monitor Options

##### M91 - Latchbolt Monitor

Latchbolt monitoring is a SPDT switch which monitors the full extension of the main latch.

##### M92 - Request to Exit Monitor

Request to Exit monitoring is a SPDT switch which monitors the activation of the trim. (Both levers activate switch)

##### M105 - Security Monitor

Security Monitor is two switches in series that monitors lock status (locked or unlocked) and Auxiliary Latch position.

Note: Monitoring options may only be ordered together as follows: M91xM92, M92xM105.

### Certification/Compliance

#### ANSI/BHMA

Certified A156.13 Series 1000, operational and security Grade 1. Meets A117.1 Accessibility Code.



#### Federal

Meets FF-H-106C.

#### UL/cUL


All locks listed for A label and lesser class doors, 4' x 10' single or 8' x 10' pair. Letter F and UL symbol on armored front indicate listing. Meets requirements of UL1034.

Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Corbin Russwin, Inc. makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire-rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

#### California State Reference Code

(Formerly Title 19, California State Fire Marshal Standard)

All levers with returns comply; levers return to within 1/2" of door face.

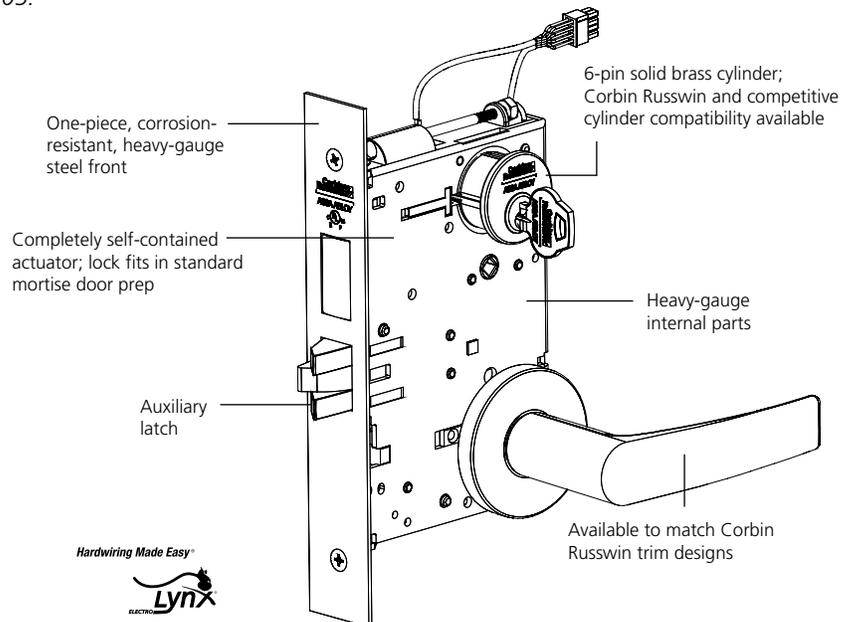

### Fail Safe

The following functions are unlocked when power is off and locked when the power is on.

Outside	Inside	Series/Function	Description
		ML20907 x SAF VR HS	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless outside grip is locked by energizing lock.</li> <li>Inside grip always free.</li> <li>Auxiliary latch deadlocks latchbolt.</li> </ul>
		ML20915 x SAF VR HS	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless both grips are locked by energizing lock.</li> <li>Auxiliary latch deadlocks latchbolt.</li> </ul>
		ML20914 x SAF VR HS	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless both grips are locked by energizing lock.</li> <li>Latchbolt by key outside when lock is energized.</li> <li>Auxiliary latch deadlocks latchbolt.</li> </ul>
		ML20932 x SAF VR HS	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless both grips are locked by energizing lock.</li> <li>Latchbolt by key inside or outside when lock is energized.</li> <li>Auxiliary latch deadlocks latchbolt.</li> </ul>
		ML20906 x SAF VR HS	<ul style="list-style-type: none"> <li>Latchbolt by grip either side, unless outside grip is locked by energizing lock.</li> <li>Latchbolt by key outside when lock is energized.</li> <li>Inside grip always free.</li> <li>Auxiliary latch deadlocks latchbolt.</li> </ul>

### Fail Secure

The following functions are locked when power is off and unlocked when the power is on.

Outside	Inside	Series/Function	Description
		ML20907 x SEC VR HS	<ul style="list-style-type: none"> <li>Latchbolt by grip either side only when lock is energized.</li> <li>Outside grip locked when lock is not energized.</li> <li>Inside grip always free.</li> <li>Auxiliary latch deadlocks latchbolt.</li> </ul>
		ML20915 x SEC VR HS	<ul style="list-style-type: none"> <li>Latchbolt by grip either side only when lock is energized.</li> <li>Both grips locked when lock is not energized.</li> <li>Auxiliary latch deadlocks latchbolt.</li> </ul>
		ML20914 x SEC VR HS	<ul style="list-style-type: none"> <li>Latchbolt by grip either side only when lock is energized.</li> <li>Both grips locked when lock is not energized.</li> <li>Latchbolt by key outside when lock is not energized.</li> <li>Auxiliary latch deadlocks latchbolt.</li> </ul>
		ML20932 x SEC VR HS	<ul style="list-style-type: none"> <li>Latchbolt by grip either side only when lock is energized.</li> <li>Both grips locked when lock is not energized.</li> <li>Latchbolt by key inside or outside when lock is not energized.</li> <li>Auxiliary latch deadlocks latchbolt.</li> </ul>
		ML20906 x SEC VR HS	<ul style="list-style-type: none"> <li>Latchbolt by grip either side only when lock is energized.</li> <li>Outside grip locked when lock is not energized.</li> <li>Latchbolt by key outside when lock is not energized.</li> <li>Inside grip always free.</li> <li>Auxiliary latch deadlocks latchbolt.</li> </ul>

HS Indicates function availability in ML2000HS.

VR Indicates function available in Vandal Resistant Trim.

# Applications

## ML20600 NAC

### ML20600 NAC Series Electrified Mortise Lock with High Security Monitoring

The high security monitoring options of our industry-leading Integrated Wiegand locks are now available in a mortise lock with ElectroLynx® connectors that can be used as a stand-alone electrified lock or in conjunction with a wall reader. Every NAC lock is shipped with door position and request to exit monitoring installed. NAC locks ordered with deadbolt are supplied with deadbolt monitoring. (PHR options will replace deadbolt monitoring with deadbolt privacy)

#### High Security Monitoring Options





- **Internal End-of-Line Monitoring**  
Integrated directly into the mortise lock, internal end-of-line resistors monitor the line from the access control panel to the lock. Typically, resistors are installed at the panel or above the door, creating vulnerability between the resistors and the locks. Incorporating resistors within the lock eliminates any risk of undetected tampering or damage, while also reducing installation costs, simplifying specifications, and offering the assurance of a factory installed and tested product.  
  
Select a compatible resistor configuration and add the appropriate quick code to the beginning of your order string:
  - **R01:** Mercury and Lenel compatible 1K $\Omega$ /2K $\Omega$  resistance supervision
  - **R03:** Software House compatible 1K $\Omega$ /2K $\Omega$  resistance supervision
  - **R04:** AMAG compatible 4-state supervision
- **Deadbolt Privacy Function (PHR)**
  - Engaging the deadbolt disables remote access control unlocking (keypad or card reader) or scheduled unlock.
  - Ideal for personal privacy areas, such as nursing rooms, on-call doctors' rooms, restrooms, and shower areas
  - To order, add the PHR to the options of your order string (available with deadbolt functions only)

#### Featuring EcoFlex™ Technology\*:

- Reduces energy consumption up to 96% as certified by GreenCircle
  - Lower operating costs
  - Assists with load reduction in optimizing energy performance credit in LEED
  - Reduces number of power supplies required
- Field configurable to fail-safe or fail-secure
- Operates from 12-24VDC, offering greater flexibility in system design
- Innovative actuator design provides superior reliability
  - Higher performance and reduced maintenance
  - Ability to have longer cable runs without negatively impacting lock function
  - Reduces risk of voltage drops and eliminates inductive kickback
  - Lower total cost of ownership





# Functions

## ML20600 NAC

Outside	Inside	Series/Function	Type	Function Description
		ML20607 x NAC x SAF Fail Safe No Key Override No Deadbolt	Entry	<ul style="list-style-type: none"> <li>• Fail Safe - Power off unlocks outside trim</li> <li>• Deadlocking latch</li> <li>• Latch retracted by inside lever at all times</li> <li>• Outside lever rigid except when lock is not energized</li> <li>• Request to exit and secure door position monitor are standard</li> </ul>
 A01		ML20606 x NAC x SAF Fail Safe With Key Override No Deadbolt	Entry	<ul style="list-style-type: none"> <li>• Fail Safe - Power off unlocks outside trim</li> <li>• Deadlocking latch</li> <li>• Latch retracted by inside lever at all times</li> <li>• Outside lever rigid except when lock is not energized</li> <li>• Key outside retracts latch</li> <li>• Request to exit and secure door position monitor are standard</li> </ul>
		ML20609 x NAC x SAF Fail Safe No Key Override With Deadbolt	Entry With Deadbolt	<ul style="list-style-type: none"> <li>• Fail Safe - Power off unlocks outside trim</li> <li>• Deadlocking latch</li> <li>• Latch and deadbolt retracted by inside lever at all times</li> <li>• Outside lever rigid except when lock is not energized</li> <li>• Turnpiece inside extends and retracts deadbolt</li> <li>• Request to exit and secure door position monitor are standard</li> </ul>
 A01		ML20608 x NAC x SAF Fail Safe With Key Override With Deadbolt	Entry With Deadbolt	<ul style="list-style-type: none"> <li>• Fail Safe - Power off unlocks outside trim</li> <li>• Deadlocking latch</li> <li>• Latch and deadbolt retracted by inside lever and deadbolt at all times</li> <li>• Outside lever rigid except when lock is not energized</li> <li>• Key outside projects or retracts deadbolt and retracts latch</li> <li>• Turnpiece inside extends and retracts deadbolt</li> <li>• Request to exit and secure door position monitor are standard</li> </ul>

# Functions

## ML20600 NAC

Outside	Inside	Series/Function	Type	Function Description
		ML20607 x NAC x SEC Fail Secure No Key Override No Deadbolt	Entry	<ul style="list-style-type: none"> <li>• Fail Secure - Power off, trim outside is locked</li> <li>• Deadlocking latch</li> <li>• Latch retracted by inside lever at all times</li> <li>• Outside lever rigid except when lock is energized</li> <li>• Request to exit and secure door position monitor are standard</li> </ul>
 		ML20606 x NAC x SEC Fail Secure With Key Override No Deadbolt	Entry	<ul style="list-style-type: none"> <li>• Fail Secure - Power off, trim outside is locked</li> <li>• Deadlocking latch</li> <li>• Latch retracted by inside lever at all times</li> <li>• Outside lever rigid except when lock is energized</li> <li>• Key outside retracts latch</li> <li>• Request to exit and secure door position monitor are standard</li> </ul>
		ML20609 x NAC x SEC Fail Secure No Key Override With Deadbolt	Entry With Deadbolt	<ul style="list-style-type: none"> <li>• Fail Secure - Power off, trim outside is locked</li> <li>• Deadlocking latch</li> <li>• Latch and deadbolt retracted by inside lever at all times</li> <li>• Outside lever rigid except when lock is energized</li> <li>• Turnpiece inside extends and retracts deadbolt</li> <li>• Request to exit and secure door position monitor are standard</li> </ul>
 		ML20608 x NAC x SEC Fail Secure With Key Override With Deadbolt	Entry With Deadbolt	<ul style="list-style-type: none"> <li>• Fail Secure - Power off, trim outside is locked</li> <li>• Deadlocking latch</li> <li>• Latch and deadbolt retracted by inside lever and deadbolt at all times</li> <li>• Outside lever rigid except when lock is energized</li> <li>• Key outside projects or retracts deadbolt and retracts latch</li> <li>• Turnpiece inside extends and retracts deadbolt</li> <li>• Request to exit and secure door position monitor are standard</li> </ul>

# How to Order

## ML20600 NAC

### Ordering Examples

#### Stock Order

Quantity	Series/Function	Technology Code	Trim	Finish	Hand	Fail-Safe/ Fail-Secure	High Security Monitoring Options
24	ML20608	NAC	111X	626	RHR	SEC	PHRR01

- ML2000 Mortise Lock x NAC x No Cylinder x Deadbolt x Fail-Secure
- Muséo® lever 111 with X rose
- Satin chrome finish
- Right hand reverse
- Deadbolt privacy function, Mercury and Lenel compatible 1K $\Omega$ /2K $\Omega$  resistance supervision

#### Stock Order

Quantity	Series/Function	Technology Code	Trim	Finish	Hand	Fail-Safe/ Fail-Secure	High Security Monitoring Options
24	ML20607	NAC	111X	626	RHR	SEC	R03

- ML2000 Mortise Lock x NAC x No Cylinder x No Deadbolt x Fail-Secure
- Muséo® lever 111 with X rose
- Satin chrome finish
- Right hand reverse
- Software House compatible 1K $\Omega$ /2K $\Omega$  resistance supervision

# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC



### Lustra

Complies with codes requiring lever to return to within 1/2" (13mm) of door face. Brass, bronze or stainless steel.



#### LWA

Lever: Wrought  
Rose: Wrought

#### LWB

Lever: Wrought  
Rose: Cast




#### LSA

Lever: Cast  
Rose: Wrought

#### LSB

Lever: Cast  
Rose: Cast

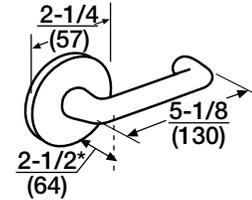


#### LWF

Lever: Wrought  
Rose: Cast

#### LSF

Lever: Cast  
Rose: Cast

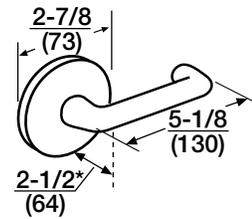

Dimensions:

inches  
millimeters

\*Dimension from face of door, not surface of rose or escutcheon.


# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC



### LWM

Lever: Wrought  
Escutcheon: Wrought  
Optional: Plug only to show; master ring

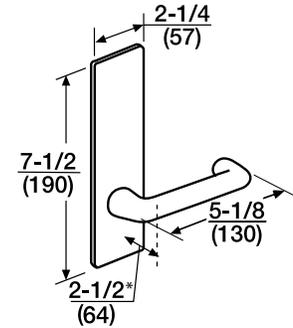


### LSM

Lever: Cast  
Escutcheon: Wrought  
Optional: Plug only to show; master ring



### LWN

Lever: Wrought  
Escutcheon: Wrought

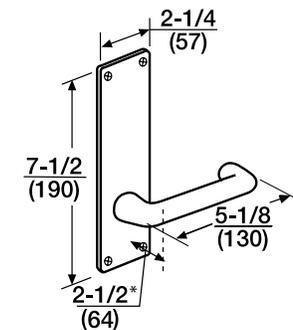


### LSN

Lever: Cast  
Escutcheon: Wrought



### LWP

Lever: Wrought  
Escutcheon: Wrought

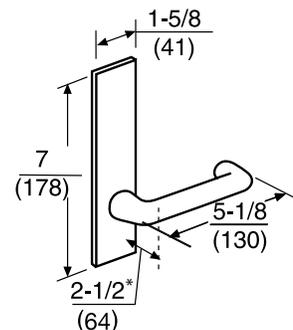


### LSP

Lever: Cast  
Escutcheon: Wrought  
Note: P Series escutcheon is not compatible with ML20900 ECL or ML20600 NAC mortise locks



### LWR

Lever: Wrought  
Escutcheon: Solid stainless steel; forged brass  
Optional: Plug only to show  
Door thickness: 1-3/8" (35mm), 1-3/4" (44mm), 2-1/4" (57mm)

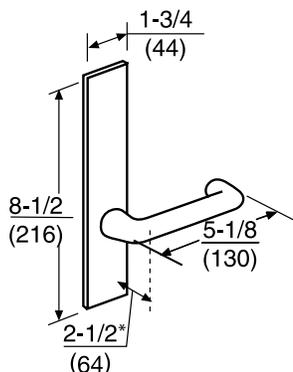

### LSR

Lever: Cast  
Escutcheon: Solid stainless steel, forged brass  
Optional: Plug only to show  
Door thickness: 1-3/8" (35mm), 1-3/4" (44mm), 2-1/4" (57mm)

\*Dimension from face of door, not surface of rose or escutcheon.

# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC




### Regis

Brass, bronze or stainless steel



#### RWA

Lever: Wrought  
Rose: Wrought




#### RWB

Lever: Wrought  
Rose: Cast

#### RSA

Lever: Cast  
Rose: Wrought




#### RSB

Lever: Cast  
Rose: Cast




#### RWF

Lever: Wrought  
Rose: Cast



#### RSF

Lever: Cast  
Rose: Cast



\*Dimension from face of door, not surface of rose or escutcheon.


# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC




### RWM

Lever: Wrought  
Escutcheon: Wrought  
Optional: Plug only to show; master ring




### RSM

Lever: Cast  
Escutcheon: Wrought  
Optional: Plug only to show; master ring




### RWN

Lever: Wrought  
Escutcheon: Wrought




### RSN

Lever: Cast  
Escutcheon: Wrought




### RWP

Lever: Wrought  
Escutcheon: Wrought




### RSP

Lever: Cast  
Escutcheon: Wrought  
Note: P Series escutcheon is not compatible with ML20900 ECL or ML20600 NAC mortise locks




### RWR

Lever: Wrought  
Escutcheon: Solid stainless steel; forged brass  
Optional: Plug only to show  
Door thickness: 1-3/8" (35mm), 1-3/4" (44mm), 2-1/4" (57mm)



### RSR

Lever: Cast  
Escutcheon: Solid stainless steel; forged brass  
Optional: Plug only to show  
Door thickness: 1-3/8" (35mm), 1-3/4" (44mm), 2-1/4" (57mm)



\*Dimension from face of door, not surface of rose or escutcheon.

# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC




### Citation

- Brass, bronze or stainless steel
- Laser engraving option  
(See Custom Laser Engraving brochure)



#### CSA

Lever: Cast  
Rose: Wrought

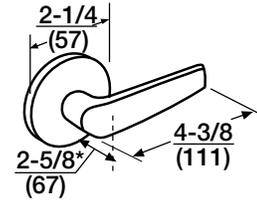


#### CSB

Lever: Cast  
Rose: Cast



#### CSF

Lever: Cast  
Rose: Cast

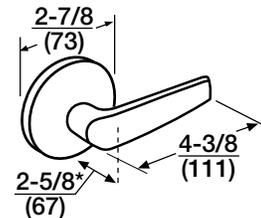

\*Dimension from face of door, not surface of rose or escutcheon.


# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC




### CSM

- Lever: Cast  
Escutcheon: Wrought  
Optional:
- Plug only to show; master ring
  - Laser engraving on lever or escutcheon

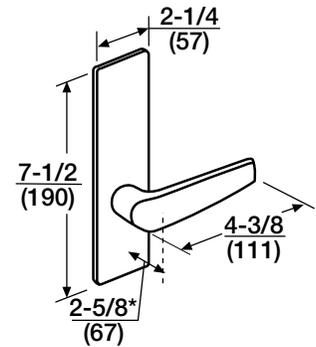


### CSN

- Lever: Cast  
Escutcheon: Wrought  
Optional: Laser engraving on lever

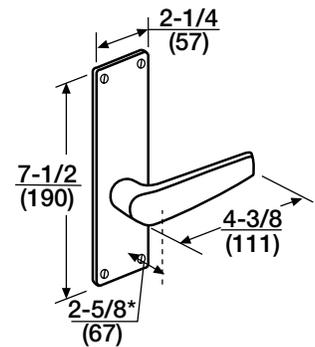


### CSP

- Lever: Cast  
Escutcheon: Wrought  
Optional: Laser engraving on lever
- Note: P Series escutcheon is not compatible with ML20900 ECL or ML20600 NAC mortise locks

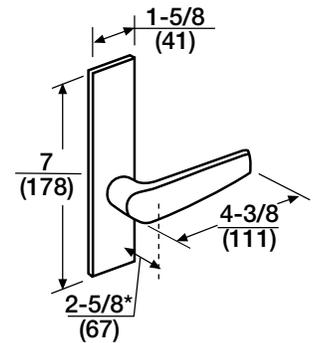

### CSR

- Lever: Cast  
Escutcheon: Solid stainless steel; forged brass  
Optional:
- Plug only to show
  - Laser engraving on lever
- Door thickness: 1-3/8" (35mm), 1-3/4" (44mm), 2-1/4" (57mm)

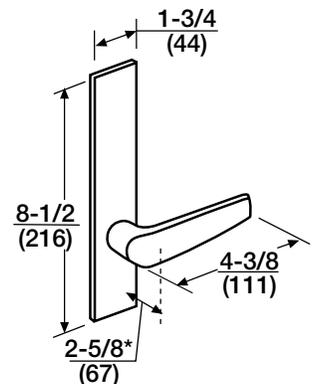

\*Dimension from face of door, not surface of rose or escutcheon.

# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC




### Newport

- Complies with codes requiring lever to return to within 1/2" (13mm) of door face.
- Brass, bronze or stainless steel
- Laser engraving option  
(See Custom Laser Engraving brochure)




### NSA

Lever: Cast  
Rose: Wrought

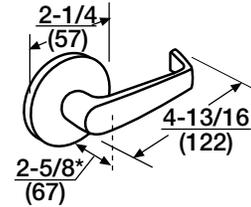

### NSF

Lever: Cast  
Rose: Cast

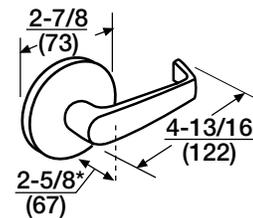

\*Dimension from face of door, not surface of rose or escutcheon.

# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC




### NSM

Lever: Cast

Escutcheon: Wrought

Optional:

- Plug only to show; master ring
- Laser engraving on lever or escutcheon

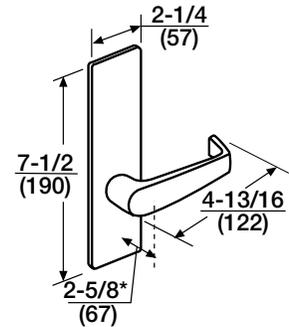


### NSN

Lever: Cast

Escutcheon: Wrought

Optional: Laser engraving on lever

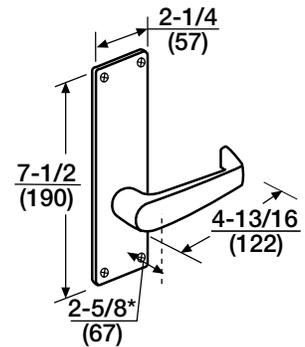


### NSP

Lever: Cast

Escutcheon: Wrought

Optional: Laser engraving on lever

Note: P Series escutcheon is not compatible with ML20900 ECL or ML20600 NAC mortise locks

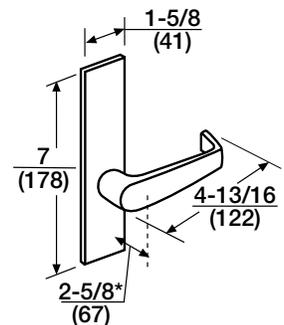

### NSR


Lever: Cast

Escutcheon: Solid stainless steel; forged brass

Optional:

- Plug only to show
- Laser engraving on lever

Door thickness: 1-3/8" (35mm), 1-3/4" (44mm), 2-1/4" (57mm)

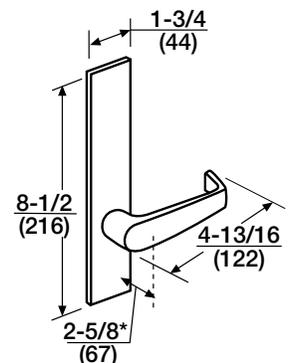

\*Dimension from face of door, not surface of rose or escutcheon.

# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC




### Armstrong

- Brass, bronze or stainless steel
- Laser engraving option  
(See Custom Laser Engraving brochure)



#### ASA

Lever: Cast  
Rose: Wrought




#### ASB

Lever: Cast  
Rose: Cast



#### ASF

Lever: Cast  
Rose: Cast



\*Dimension from face of door, not surface of rose or escutcheon.

# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC




### ASM

Lever: Cast

Escutcheon: Wrought

Optional:

- Plug only to show; master ring
- Laser engraving on lever or escutcheon

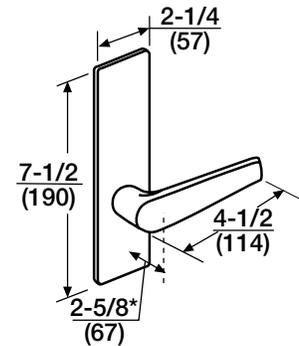


### ASN

Lever: Cast

Escutcheon: Wrought

Optional: Laser engraving on lever

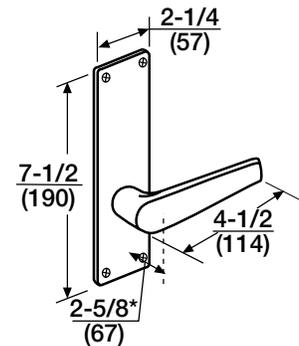


### ASP

Lever: Cast

Escutcheon: Wrought

Optional: Laser engraving on lever

Note: P Series escutcheon is not compatible with ML20900 ECL or ML20600 NAC mortise locks

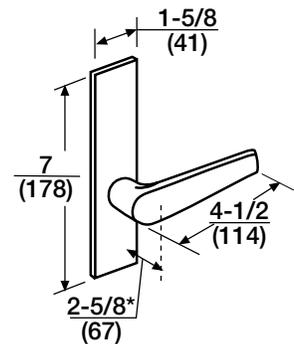

### ASR


Lever: Cast

Escutcheon: Solid stainless steel;  
forged brass

Optional:

- Plug only to show
- Laser engraving on lever

Door thickness: 1-3/8" (35mm),  
1-3/4" (44mm), 2-1/4" (57mm)

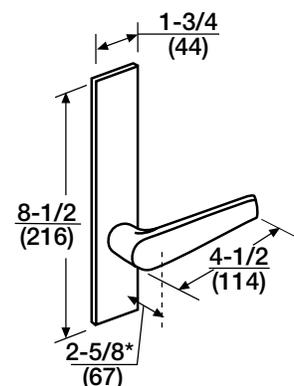

\*Dimension from face of door, not surface of rose or escutcheon.

# Trim Designs

ML2000, ML20900 ECL and ML20600 NAC



## Dirke


Brass, bronze or stainless steel

- Not reversible
- Handed levers




### DSA

Lever: Cast  
Rose: Wrought  
Specify hand

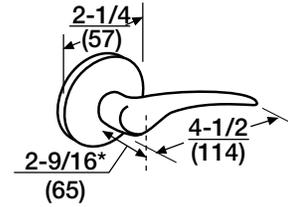

### DSF

Lever: Cast  
Rose: Cast  
Specify hand

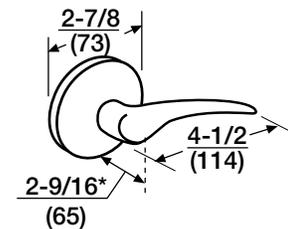


# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC




### DSM

Lever: Cast  
Escutcheon: Wrought  
Optional: Plug only to show; master ring  
Specify hand

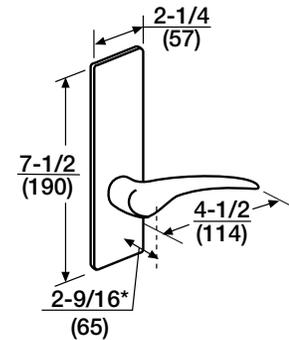

### DSN


Lever: Cast  
Escutcheon: Wrought  
Specify hand

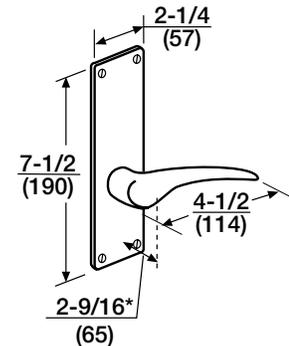

### DSP


Lever: Cast  
Escutcheon: Wrought  
Specify hand

Note: P Series escutcheon is not compatible with ML20900 ECL or ML20600 NAC mortise locks

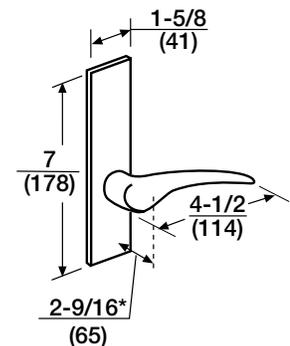

### DSR

Lever: Cast  
Escutcheon: Solid stainless steel;  
forged brass  
Optional: Plug only to show  
Door thickness:  $1\frac{3}{8}$ " (35mm),  
 $1\frac{3}{4}$ " (44mm),  $2\frac{1}{4}$ " (57mm)  
Specify hand

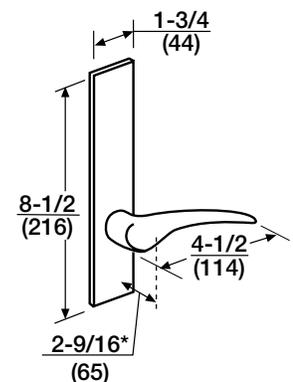

# Trim Designs

ML2000, ML20900 ECL and ML20600 NAC




## Essex

Complies with codes requiring lever to return to within 1/2" (13mm) of door face.  
Brass, bronze or stainless steel



### ESA

Lever: Cast  
Rose: Wrought

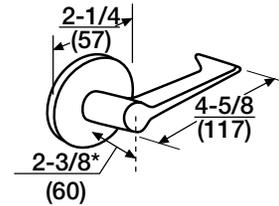


### ESB

Lever: Cast  
Rose: Cast



### ESF

Lever: Cast  
Rose: Cast

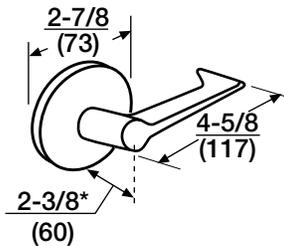


# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC




### ESM

Lever: Cast  
Escutcheon: Wrought  
Optional: Plug only to show; master ring

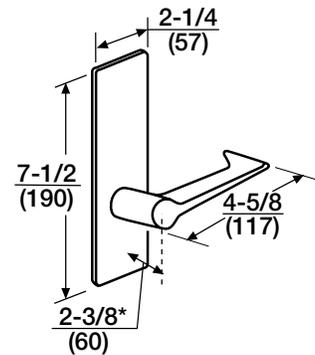


### ESN

Lever: Cast  
Escutcheon: Wrought

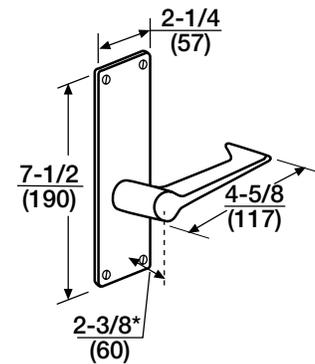


### ESP

Lever: Cast  
Escutcheon: Wrought  
Note: P Series escutcheon is not compatible with ML20900 ECL or ML20600 NAC mortise locks

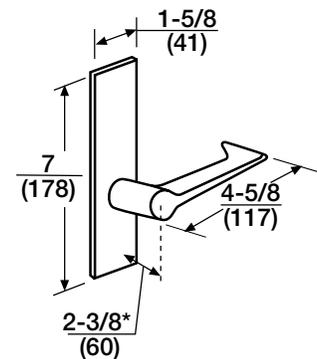

### ESR

Lever: Cast  
Escutcheon: Solid stainless steel; forged brass  
Optional: Plug only to show  
Door thickness:  $1\frac{3}{8}$ " (35mm),  $1\frac{3}{4}$ " (44mm),  $2\frac{1}{4}$ " (57mm)

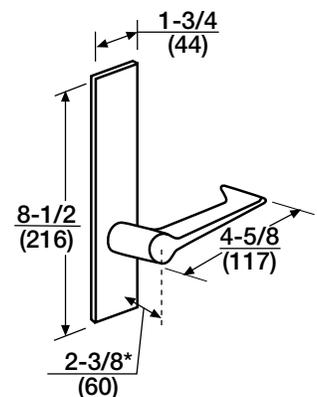

\*Dimension from face of door, not surface of rose or escutcheon.

# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC




### Princeton

- Complies with codes requiring lever to return to within 1/2" (13mm) of door face.
- Brass, bronze or stainless steel
- Laser engraving option  
(See Custom Laser Engraving brochure)




#### PSA

Lever: Cast  
Rose: Wrought

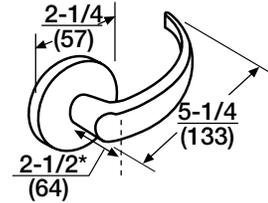

#### PSB

Lever: Cast  
Rose: Cast

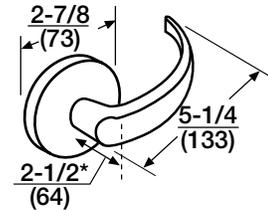

#### PSF

Lever: Cast  
Rose: Cast

\*Dimension from face of door, not surface of rose or escutcheon.

# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC




### PSM

Lever: Cast

Escutcheon: Wrought

Optional:

- Plug only to show; master ring
- Laser engraving on lever or escutcheon

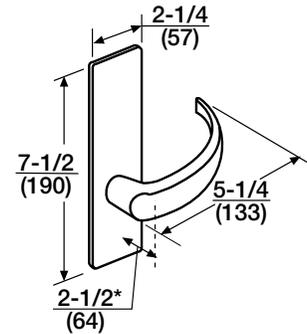


### PSN

Lever: Cast

Escutcheon: Wrought

Optional: Laser engraving on lever

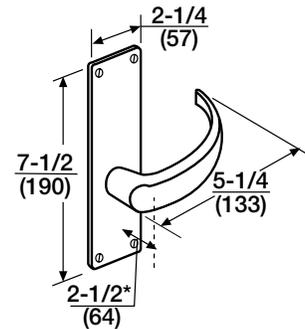


### PSP

Lever: Cast

Escutcheon: Wrought

Optional: Laser engraving on lever

Note: P Series escutcheon is not compatible with ML20900 ECL or ML20600 NAC mortise locks

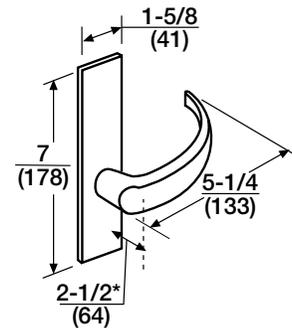

### PSR


Lever: Cast

Escutcheon: Solid stainless steel; forged brass

Optional:

- Plug only to show
- Laser engraving on lever


Door thickness: 1-3/8" (35mm), 1-3/4" (44mm), 2-1/4" (57mm)

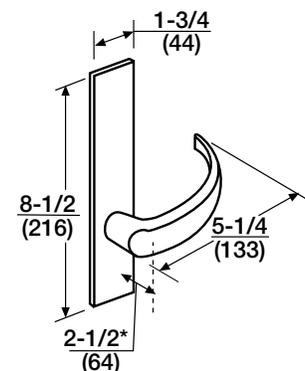

\*Dimension from face of door, not surface of rose or escutcheon.

# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC

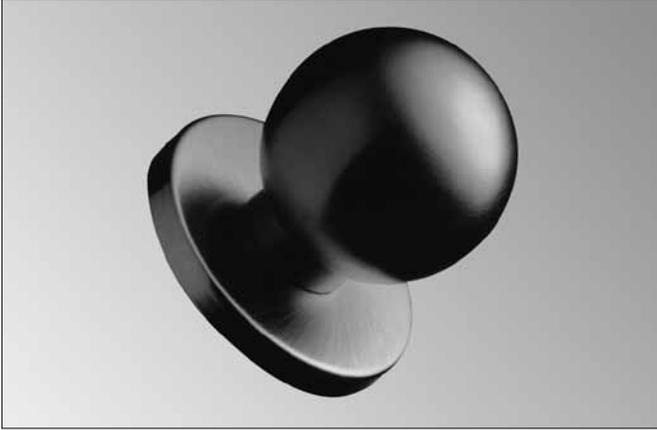


### Global

Brass, bronze or stainless steel




#### GRC

Knob: Wrought reinforced  
Rose: Wrought reinforced



GRC




GWC




#### GRD

Knob: Wrought reinforced  
Rose: Wrought reinforced



GRD




GWD




#### GSA

Knob: Cast  
Rose: Wrought



GSA  
GSB



GSF

#### GSB

Knob: Cast  
Rose: Cast


#### GSF

Knob: Cast  
Rose: Cast




#### GRE

Knob: Wrought reinforced  
Rose: Wrought reinforced



GRE



GWE

#### GWE

Knob: Wrought  
Rose: Wrought reinforced

# Trim Designs


## ML2000, ML20900 ECL and ML20600 NAC



**GRM<sup>1</sup>**  
Knob: Wrought reinforced  
Escutcheon: Wrought

**GSM<sup>1</sup>**  
Knob: Cast  
Escutcheon: Wrought


**GWM<sup>1</sup>**  
Knob: Wrought  
Escutcheon: Wrought

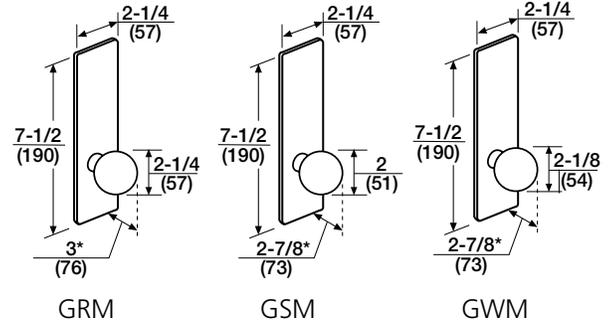

**GRN**  
Knob: Wrought reinforced  
Escutcheon: Wrought

**GSN**  
Knob: Cast  
Escutcheon: Wrought


**GWN**  
Knob: Wrought  
Escutcheon: Wrought

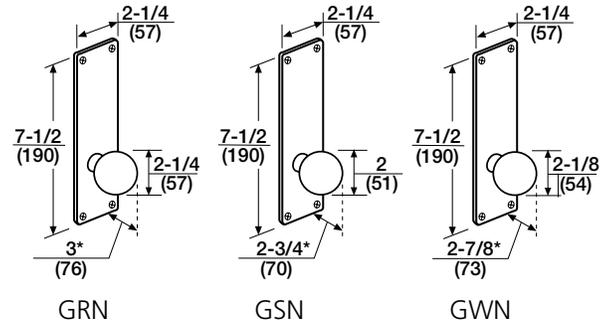

**GRP**  
Knob: Wrought reinforced  
Escutcheon: Wrought

**GSP**  
Knob: Cast  
Escutcheon: Wrought


**GWP**  
Knob: Wrought  
Escutcheon: Wrought  
Note: P Series escutcheon is not compatible with ML20900 ECL or ML20600 NAC mortise locks

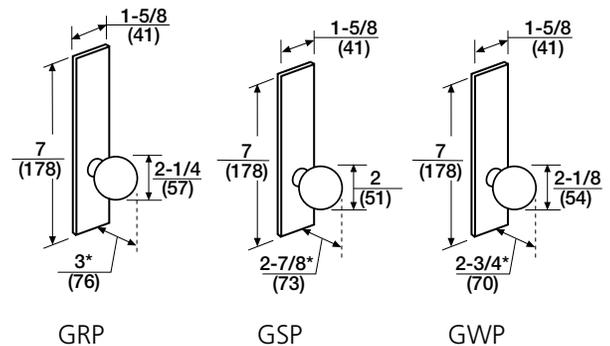

**GSR<sup>1,2</sup>**  
Knob: Cast  
Escutcheon: Solid stainless steel; forged brass

**GRR<sup>1,2</sup>**  
Knob: Wrought reinforced  
Escutcheon: Solid stainless steel; forged brass


**GWR<sup>1,2</sup>**  
Knob: Wrought  
Escutcheon: Solid stainless steel; forged brass

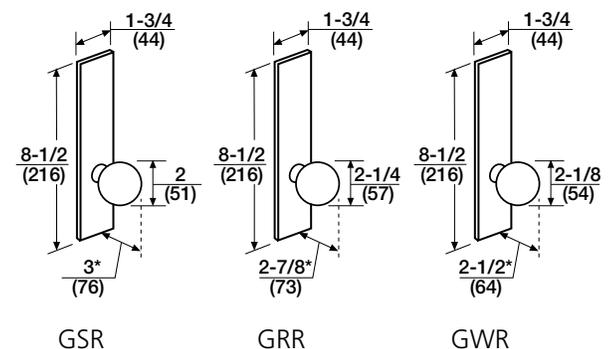

1. Optional: Plug only to show; master ring  
2. Door thickness: 1-3/8" (35mm), 1-3/4" (44mm), 2-1/4" (57mm)  
\*Dimension from face of door, not surface of rose or escutcheon.

# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC

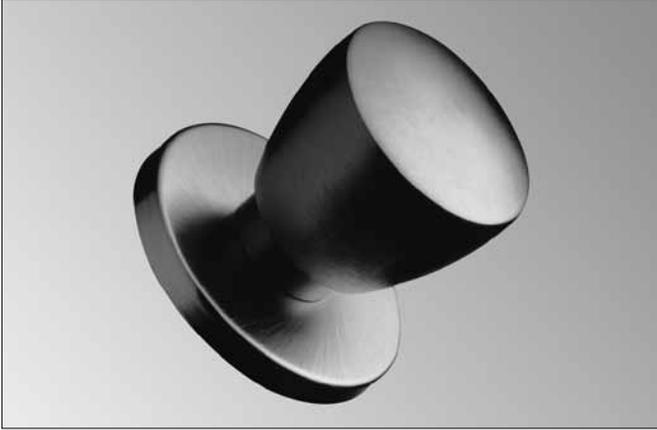


### Belmont

Brass, bronze or stainless steel




#### BRC

Knob: Wrought reinforced  
Rose: Wrought reinforced



BRC




BWC




#### BRD

Knob: Wrought reinforced  
Rose: Wrought reinforced



BRD




BWD




#### BRE

Knob: Wrought reinforced  
Rose: Wrought reinforced



BRE



BWE

#### BWE

Knob: Wrought  
Rose: Wrought reinforced

\*Dimension from face of door, not surface of rose or escutcheon.

# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC




### BRM<sup>1</sup>

Knob: Wrought reinforced  
Escutcheon: Wrought

### BWM<sup>1</sup>

Knob: Wrought  
Escutcheon: Wrought

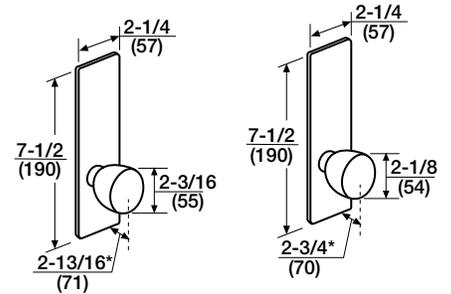

BRM

BWM




### BRN

Knob: Wrought reinforced  
Escutcheon: Wrought

### BWN

Knob: Wrought  
Escutcheon: Wrought

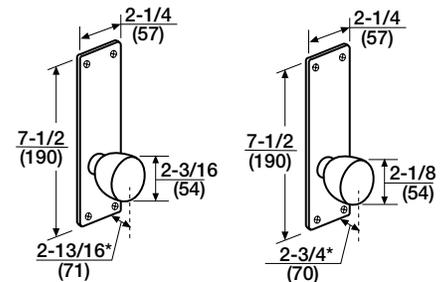

BRN

BWN




### BRP

Knob: Wrought reinforced  
Escutcheon: Wrought

### BWP

Knob: Wrought  
Escutcheon: Wrought

Note: P Series escutcheon is not compatible with ML20900 ECL or ML20600 NAC mortise locks

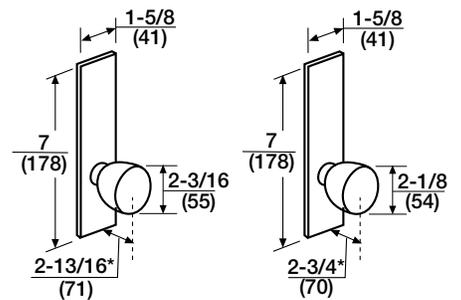

BRP

BWP




### BRR<sup>1,2</sup>

Knob: Wrought reinforced  
Escutcheon: Solid stainless steel;  
forged brass

### BWR<sup>1,2</sup>

Knob: Wrought  
Escutcheon: Solid stainless steel;  
forged brass

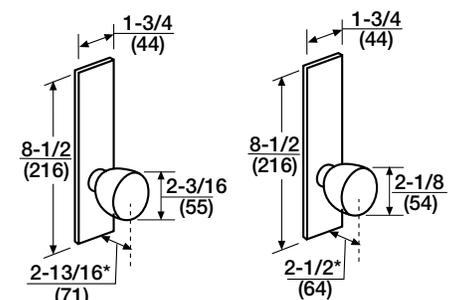

BRR

BWR

1. Optional: Plug only to show; master ring
2. Door thickness: 1-3/8" (35mm), 1-3/4" (44mm), 2-1/4" (57mm)

\*Dimension from face of door, not surface of rose or escutcheon.

# Trim Designs

ML2000, ML20900 ECL and ML20600 NAC



## Yankee

Brass, bronze or stainless steel




### YWA

Knob: Wrought  
Rose: Wrought


### YWB

Knob: Wrought  
Rose: Cast

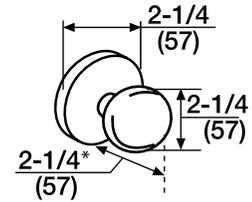


### YWF

Knob: Wrought  
Rose: Cast

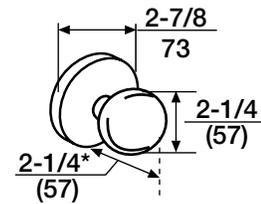

### YWM

Knob: Wrought  
Escutcheon: Wrought  
Optional: Plug only to show; master ring

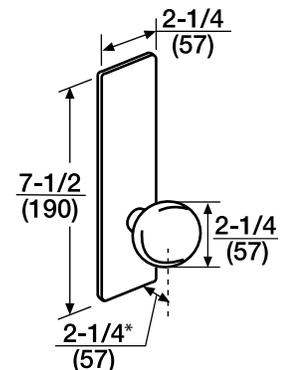

\*Dimension from face of door, not surface of rose or escutcheon.


# Trim Designs

## ML2000, ML20900 ECL and ML20600 NAC



### YWN


Knob: Wrought  
Rose: Wrought

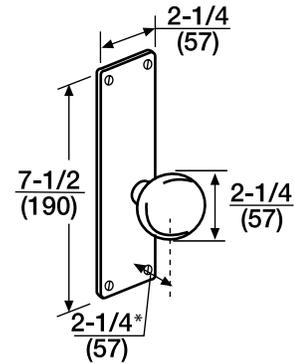

### YWP


Knob: Wrought  
Escutcheon: Wrought

Note: P Series escutcheon is not compatible with ML20900 ECL or ML20600 NAC mortise locks

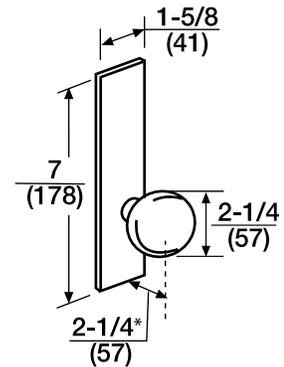

### YWR

Knob: Wrought  
Escutcheon: Solid stainless steel or forged brass  
Optional: Plug only to show  
Door thickness: 1-3/8" (35mm), 1-3/4" (44mm), 2-1/4" (57mm)


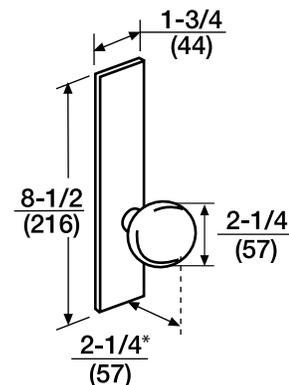


\*Dimension from face of door, not surface of rose or escutcheon.


# Muséo® Trim

## ML2000, ML20900 ECL and ML20600 NAC


### Muséo Collection Roses<sup>1</sup> and Escutcheons

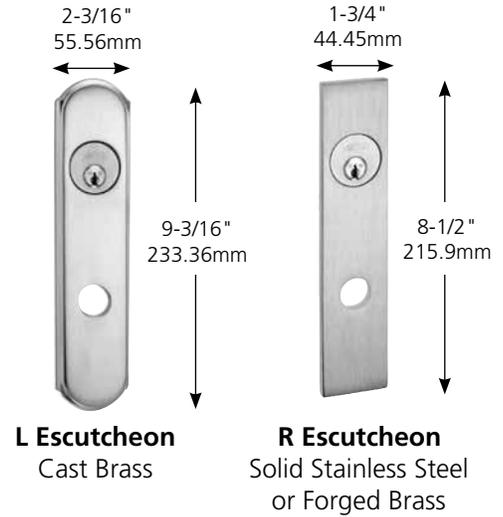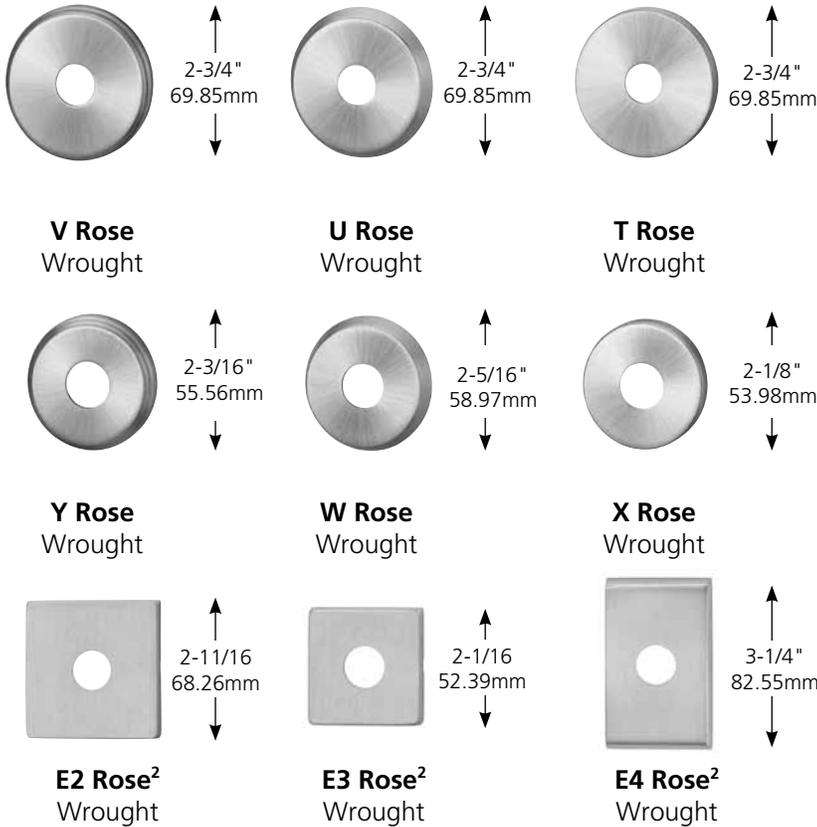

### Thumbturns<sup>3</sup>

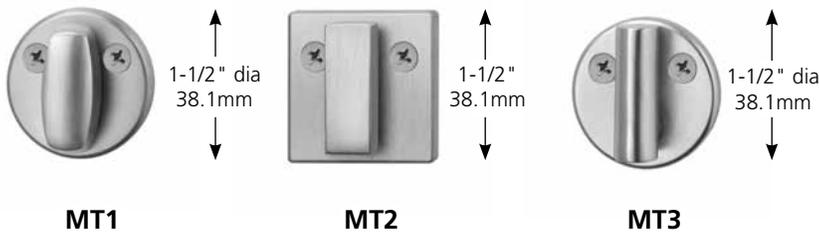

### Inspire™ Roseless Trim

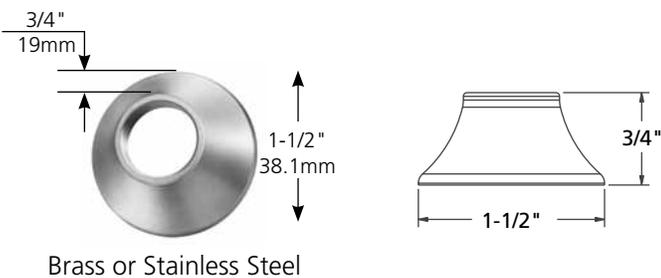

#### Notes:

1. Roses and Inspire trim are only available with *Muséo* levers.
2. Square cylinder collar and thumbturn backplate automatically supplied with E2, E3 and E4 roses.
3. Thumbturn back plate will match shape of rose chosen (i.e. round or square).

# Inspire™ Roseless Trim

ML2000, ML20900 ECL and ML20600 NAC




## Inspire™ Roseless Trim



Inspire roseless trim blends the lever and the door creating an artful approach to every opening. Offered with most Muséo® decorative levers, this exquisite trim will inspire the creation of beautiful openings.

### Features:

- Certified to and exceeds ANSI/BHMA A156.13, Series 1000, Operational Grade 1 and Security Grade 1
- Attachment method similar to standard trim
- Available with all mortise lock functions
- Compatible with most Muséo Line levers (except 104, 111, 113, 121, Josef, Georges and Piet levers)
- Selected levers return within 1/2" of the door face
- All standard cylinder options are available
- Available for 1-3/8", 1-3/4", and 2-1/4" thick doors only (contact factory for other door thicknesses)

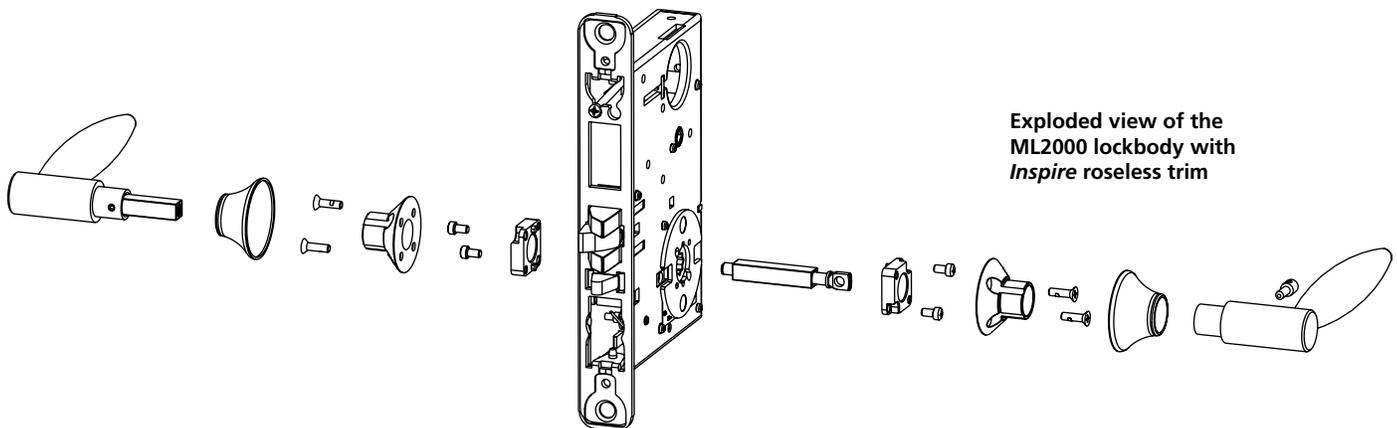

### How to Order Inspire Roseless Trim

Quantity	Series/Function	Trim*	Finish	Hand
50	ML2055	102J	626	RHR

\*Specify J for the rose when ordering Inspire roseless trim.

# Muséo® Trim Designs

ML2000, ML20900 ECL and ML20600 NAC



## Georgia


Timeless elegance in forms inspired by the natural world.

Laser Engraving offered on 102, 103, 124 and 125. See Custom Laser Engraving brochure for details.




### 101<sup>2/3</sup>

Lever: Cast  
Non-Handed lever

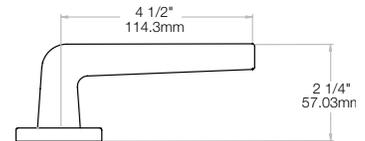


### 102

Lever: Cast  
Non-Handed lever

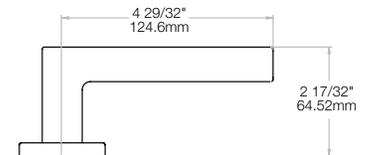


### 103

Lever: Cast  
Non-Handed lever

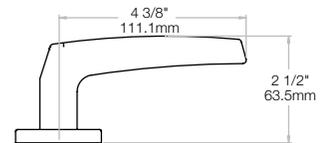


### 104<sup>2</sup>

Lever: Cast  
Non-Handed lever

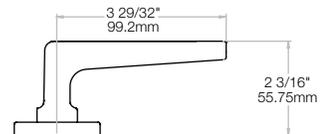


### 124<sup>1</sup>

Lever: Cast  
Non-Handed lever

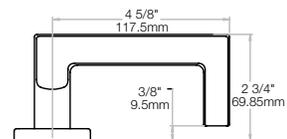

### 125<sup>1</sup>

Lever: Cast  
Non-Handed lever

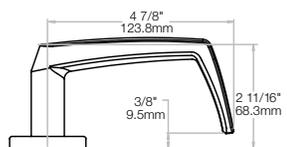

1. Complies with codes requiring lever to return to within 1/2" (13mm) of door face.
2. Not available with Inspire™ roseless trim.
3. Contact factory for current lead times.

# Muséo® Trim Designs

ML2000, ML20900 ECL and ML20600 NAC




## Pablo


Diminutive, yet distinctive and striking in style.



**117**  
Lever: Cast  
Non-Handed lever

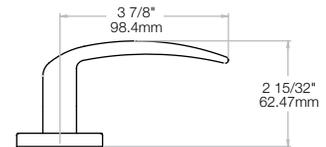

**126<sup>1</sup>**  
Lever: Cast  
Handed - Specify hand  
Non-Reversible

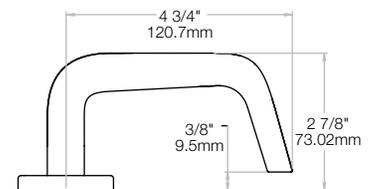

1. Complies with codes requiring lever to return to within 1/2" (13mm) of door face.

# Muséo® Trim Designs

ML2000, ML20900 ECL and ML20600 NAC




## Jackson


Intuitive shapes, moving with the energetic rhythm of modern life.




**105<sup>3</sup>**  
Lever: Cast  
Non-handed lever

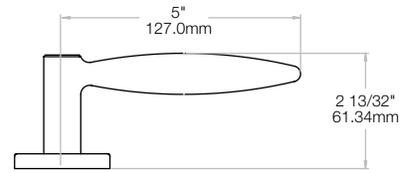


**119**  
Lever: Cast  
Handed - Specify hand  
Non-Reversible

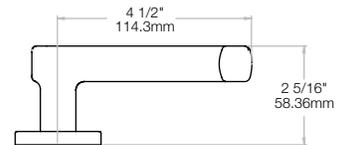


**121<sup>2</sup>**  
Lever: Cast  
Handed - Specify hand  
Non-Reversible

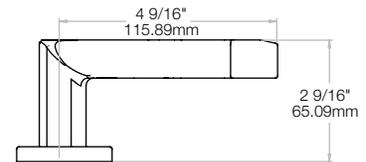

**122**  
Lever: Cast  
Handed - Specify hand  
Non-Reversible

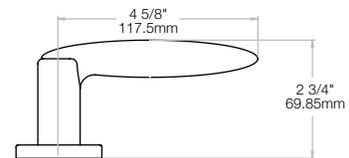

**127<sup>1</sup>**  
Lever: Cast  
Handed - Specify hand  
Non-Reversible

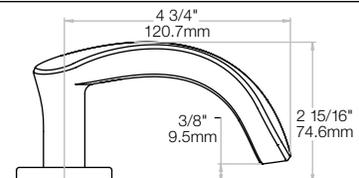

1. Complies with codes requiring lever to return to within 1/2" (13mm) of door face.
2. Not available with Inspire™ roseless trim.
3. Contact factory for current lead times.

# Muséo® Trim Designs

ML2000, ML20900 ECL and ML20600 NAC




## Salvador


Dreamlike beauty manifested in solid, familiar forms.




**106**  
Lever: Cast  
Non-handed lever

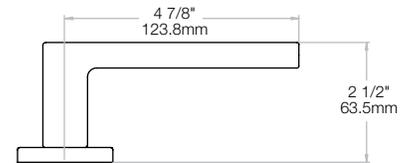


**107**  
Lever: Cast  
Non-handed lever

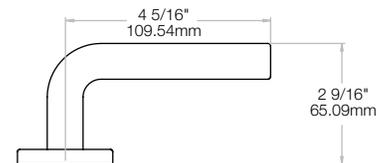

**108**  
Lever: Cast  
Non-handed lever

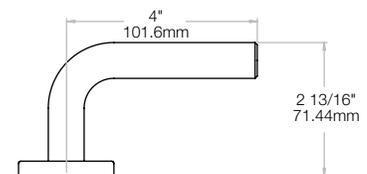

**109**  
Lever: Cast  
Non-Handed lever

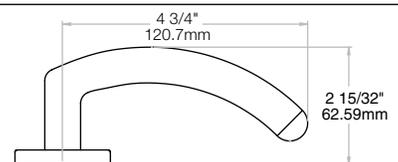

# Muséo® Trim Designs

ML2000, ML20900 ECL and ML20600 NAC




## Salvador


Dreamlike beauty manifested in solid, familiar forms.




**110**  
Lever: Cast  
Non-handed lever

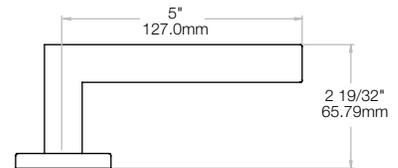

**123<sup>1</sup>**  
Lever: Cast  
Non-handed lever

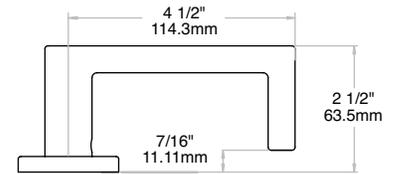

**128<sup>1</sup>**  
Lever: Cast  
Non-handed lever

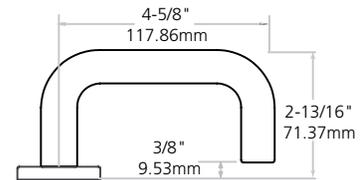

1. Complies with codes requiring lever to return to within 1/2" (13mm) of door face.

# Muséo® Trim Designs

ML2000, ML20900 ECL and ML20600 NAC




## Marc

Fluid lyricism expressed through whimsical lines and dynamic contours.




### 111<sup>2</sup>

Lever: Cast  
Handed - Specify hand  
Non-Reversible

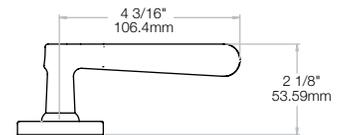


### 112

Lever: Cast  
Handed - Specify hand  
Non-Reversible

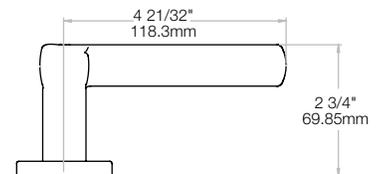


### 113<sup>2</sup>

Lever: Cast  
Handed - Specify hand  
Non-Reversible

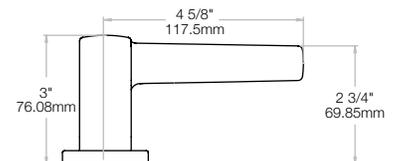

### 114

Lever: Cast  
Handed - Specify hand  
Non-Reversible

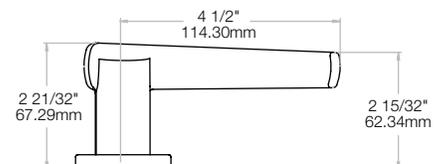

2. Not available with Inspire™ roseless trim.

ASSA ABLOY, the global leader in door opening solutions

45300-8/15

Copyright © 2001-2015 Corbin Russwin, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin, Inc. is prohibited.

ML2000.47

# Muséo® Trim Designs

ML2000, ML20900 ECL and ML20600 NAC




## Marc

Fluid lyricism expressed through whimsical lines and dynamic contours.




**115**

Lever: Cast  
Handed - Specify hand  
Non-Reversible

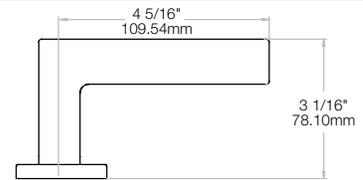


**116**

Lever: Cast  
Handed - Specify hand  
Non-Reversible

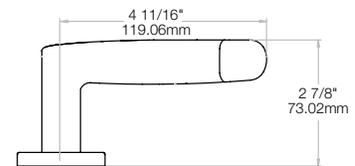


**130<sup>1</sup>**

Lever: Cast  
Handed - Specify hand  
Non-Reversible

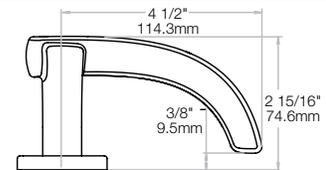


**131<sup>1</sup>**

Lever: Cast  
Handed - Specify hand  
Non-Reversible

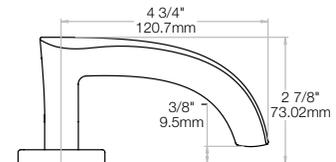

**132<sup>1</sup>**

Lever: Cast  
Handed - Specify hand  
Non-Reversible

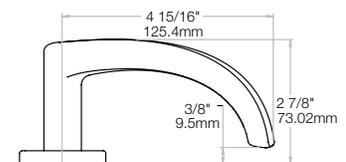

# Muséo® Trim Designs

ML2000, ML20900 ECL and ML20600 NAC




## Piet\*

Striking levers with sleek, clean lines.


\* Refer to page 68 for how to order the Muséo® Piet Lever Collection.  
Not available with Inspire™ roseless trim.




**21G**  
Grooved Insert  
Lever: Cast  
Non-Handed Lever

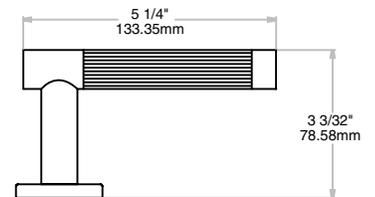


**21L**  
Leather Insert  
Lever: Cast  
Non-Handed Lever

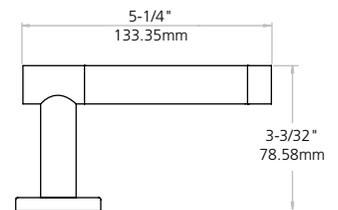


**21M**  
Polished with Satin Insert  
Lever: Cast  
Non-Handed Lever

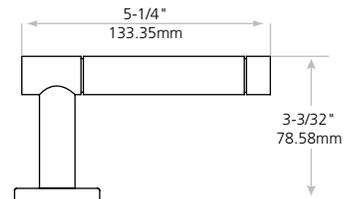

**21S**  
Santoprene™ Insert  
Lever: Cast  
Non-Handed Lever

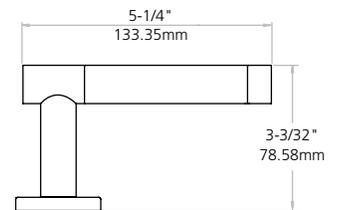

**21W**  
Wood Insert  
Lever: Cast  
Non-Handed Lever

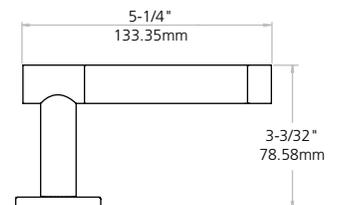

# Muséo® Trim Designs

ML2000, ML20900 ECL and ML20600 NAC




## Piet\*

Striking levers with sleek, clean lines.


\* Refer to page 68 for how to order the Muséo® Piet Lever Collection.  
Not available with Inspire™ roseless trim.




**23M**  
With Raised Band  
Lever: Cast  
Non-Handed Lever

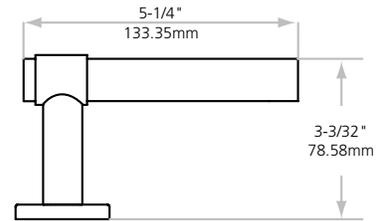

**25M**  
Plain  
Lever: Cast  
Non-Handed Lever

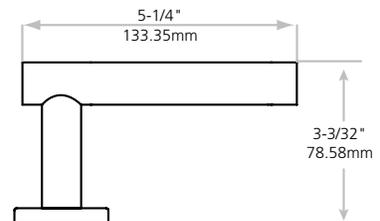

**27M**  
Plain with Two Grooves  
Lever: Cast  
Non-Handed Lever

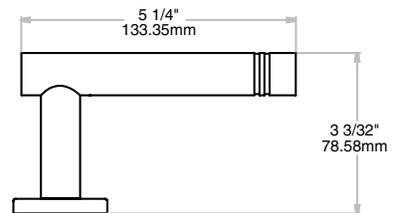

# Muséo® Trim Designs

ML2000, ML20900 ECL and ML20600 NAC




## Josef<sup>2/3</sup>


Tribute to the square with beautifully simple, but dramatic forms.



**133**  
Lever: Cast  
Non-Handed lever

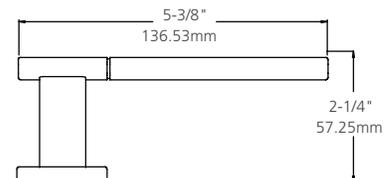


**134<sup>1</sup>**  
Lever: Cast  
Non-Handed lever

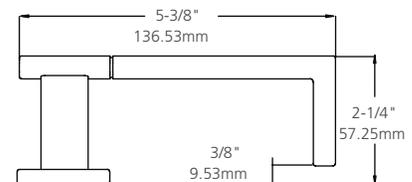

1. Complies with codes requiring lever to return to within 1/2" (13mm) of door face.
2. Not available with Inspire™ roseless trim.
3. 135-138 contain white or black polycarbonate insert


# Muséo® Trim Designs

ML2000, ML20900 ECL and ML20600 NAC

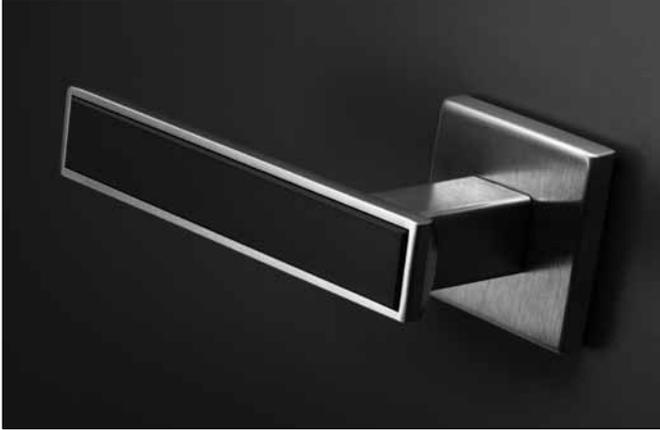


## Josef<sup>2/3</sup>


Tribute to the square with beautifully simple, but dramatic forms.

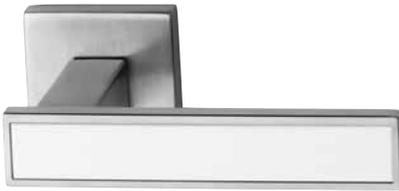


**135**  
Lever: Cast  
Non-Handed lever

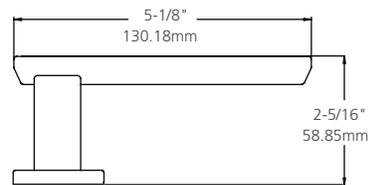


**136**  
Lever: Cast  
Non-Handed lever

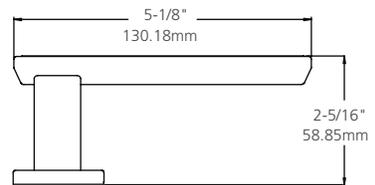

**137<sup>1</sup>**  
Lever: Cast  
Non-Handed lever

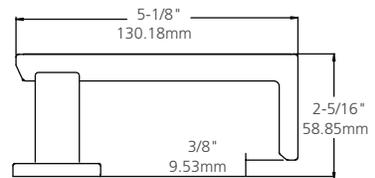

**138<sup>1</sup>**  
Lever: Cast  
Non-Handed lever

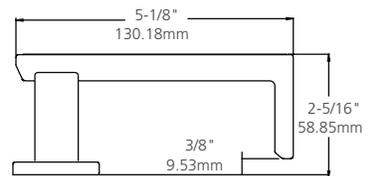

1. Complies with codes requiring lever to return to within 1/2" (13mm) of door face.
2. Not available with Inspire™ roseless trim.
3. 135-138 contain white or black polycarbonate insert

# Muséo® Trim Designs

ML2000, ML20900 ECL and ML20600 NAC




## Georges<sup>2</sup>


Structural pieces that evoke an emotional response with sophisticated design.




**139**  
Lever: Cast  
Non-Handed lever

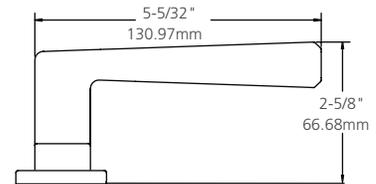

**140**  
Lever: Cast  
Handed lever

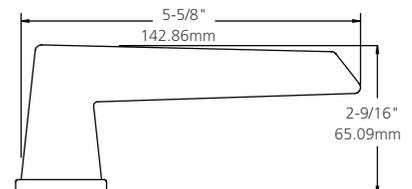


**141**  
Lever: Cast  
Non-Handed lever

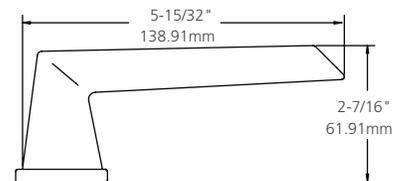

2. Not available with Inspire™ roseless trim.

# Muséo® Trim Designs

ML2000, ML20900 ECL and ML20600 NAC

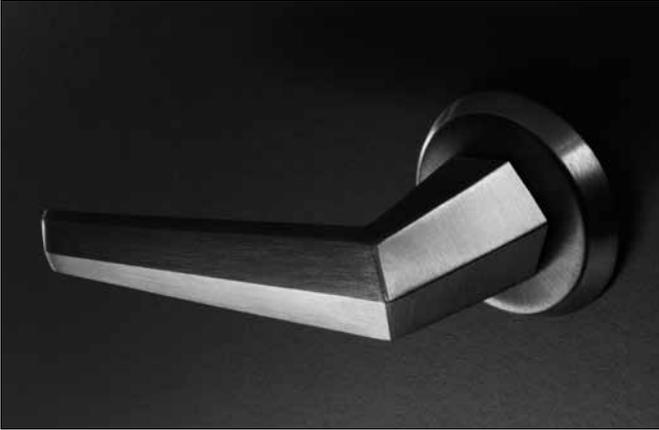


## Georges<sup>2</sup>


Structural pieces that evoke an emotional response with sophisticated design.



**142**  
Lever: Cast  
Non-Handed lever

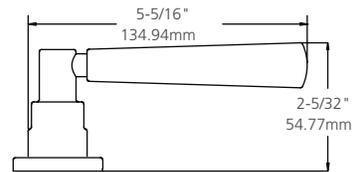

**143**  
Lever: Cast  
Non-Handed lever

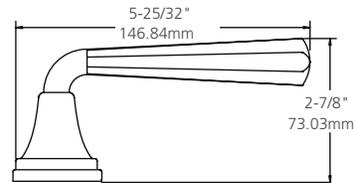

2. Not available with Inspire™ roseless trim.

# Vineyard™ Collection Trim Designs

ML2000, ML20900 ECL and ML20600 NAC




## Merlot

Like its namesake, the Merlot blends with — and enhances — any decor.




### MSG

Lever: Cast  
Rose: Cast

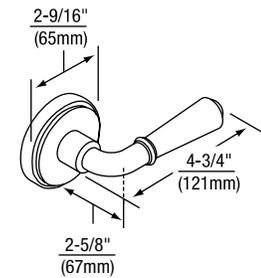

### MSL

Lever: Cast  
Escutcheon: Cast

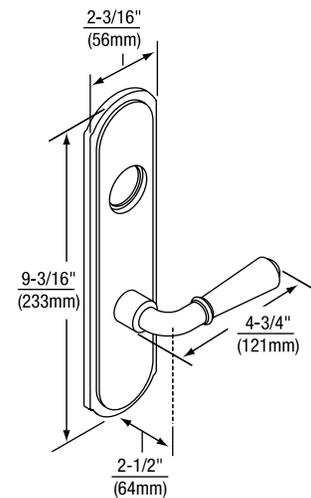

# Vineyard™ Collection Trim Designs

ML2000, ML20900 ECL and ML20600 NAC



## Zinfandel


Vigorous and complex in design, the Zinfandel adds finesse to any opening.

- Handed Levers




### ZSG

Lever: Cast  
Rose: Cast  
Specify hand.

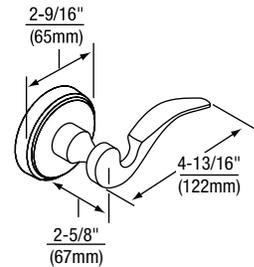

### ZSL

Lever: Cast  
Escutcheon: Cast  
Specify hand.

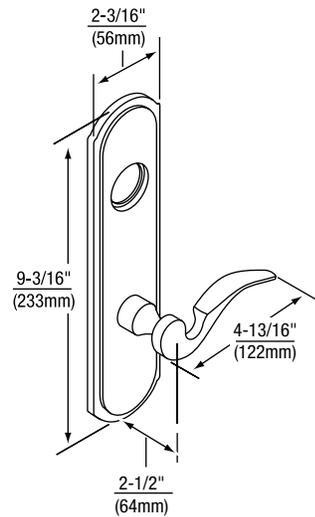

# Vineyard™ Collection Trim Designs

ML2000, ML20900 ECL and ML20600 NAC



## Frascati


Fresh yet classic, the Frascati exudes the casual, timeless elegance of the Roman hills.

- Non-Reversible
- Handed Levers




### FSG

Lever: Cast  
Rose: Cast

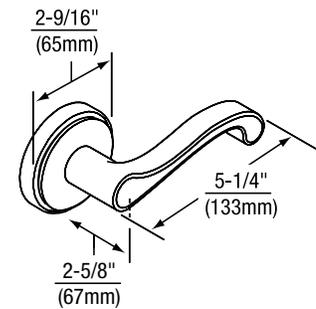

### FSL

Lever: Cast  
Escutcheon: Cast

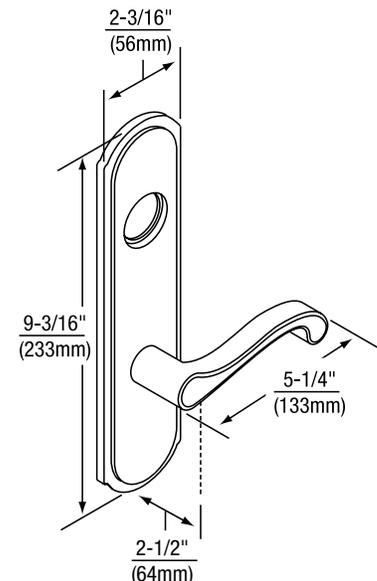

# High Security Trim

## ML2000

### ML2000HS High Security Mortise Trim

#### Applications

Designed for high-traffic commercial, industrial, institutional and government buildings that require a greater degree of security than traditional mortise trim provide. Applications may include:

- Computer rooms
- Hospital pharmacies
- Banks
- Storage facilities
- Government installations
- Prisons and detention facilities
- Evidence rooms
- Weapons storage

#### Advantages

- Flush-mounted conventional fixed core cylinder
- Cast escutcheons and knobs, double through-bolted
- Torx® pin tamper resistant security screws
- Armored front to protect against tampering
- 1" throw 1-piece stainless steel deadbolt
- 10-year limited warranty




## Surety

Brass or bronze

#### SST

Knob: Cast brass or bronze  
Escutcheon: Cast brass or bronze  
Optional: Blank inside escutcheon (M07)  
Door thickness: 1-3/4" (44mm),  
2" (51mm), 2-1/4" (57mm)

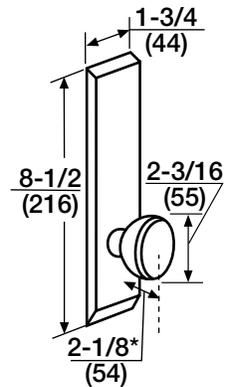

Note: This is the only trim that is available on the ML2000HS. It is not available on the standard ML2000 lockset.

# Vandal Resistant Trim

ML2000

## ML2000VR Series Vandal-Resistant Mortise Trim

### Applications

Designed for high-traffic commercial, industrial, institutional and government buildings that require a greater degree of security and vandal resistance not found on other mortise trims. Applications may include:

- Schools and universities
- Computer rooms
- Hospital pharmacies
- Banks
- Storage facilities
- Government installations
- Prisons and detention facilities
- Evidence rooms
- Weapons storage

### Advantages


- Flush-mounted conventional fixed core cylinder
- Cast escutcheons and levers; double through-bolted
- Torx® pin tamper resistant security screws
- Armored front to protect against tampering
- Free-floating spindle self-adjusts for door thicknesses from 1-3/4" to 2-1/4"
- Levers remain attached if spindle is broken



## Newport

### NSV


Lever: Cast stainless steel  
Escutcheon: Cast stainless steel  
Door thickness: 1-3/4" (44mm) standard, 2" (51mm) specify D200, 2-1/4" (57mm) specify D214

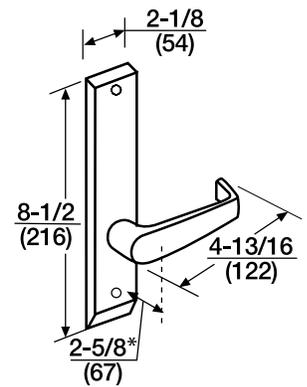

## Citation

### CSV

Lever: Cast stainless steel  
Escutcheon: Cast stainless steel  
Door thickness: 1-3/4" (44mm) standard, 2" (51mm) specify D200, 2-1/4" (57mm) specify D214

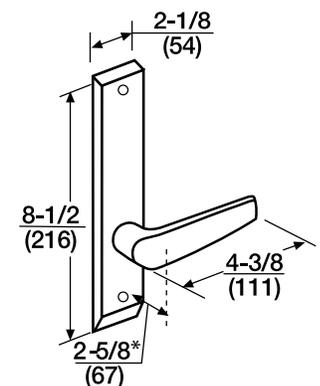

Notes: This trim only available for ML2000VR and ML20900VR locksets.  
Only available in 630 (US32D) finish.

# Behavioral Health Trim

## ML2000



U.S. Patent Number: D 690,577


### BHSS\*

Part of the Behavioral Health Series™ of products, the ML2000 mortise lock with BHSS trim provides an innovative solution for behavioral health environments. The unique integrated lever and escutcheon combines aesthetics with safety. Ease of operation, along with the strength and versatility of the ML2000 mortise lock allows its use in many applications.

Refer to the Specialty Hardware Catalog (45205) for more information.




**BHSS**  
Stainless Steel

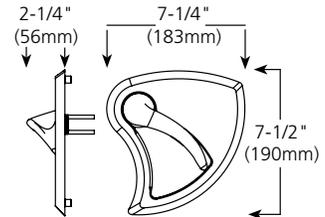

**Thumbturn - BHSS**  
Stainless Steel  
Door thickness: 1-3/4" (44mm)  
through 2-1/4" (57mm)

(Not available with Occupancy Indicator)

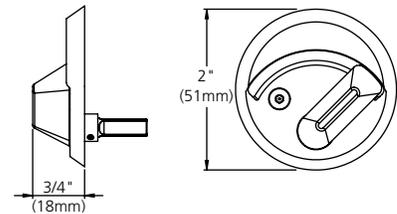

### How to Order

#### BHSS

Quantity	Series/Function	Trim	Finish**	Hand
100	ML2010	BHSS	630	RHR

\*\*BHSS is not available in 625 (Bright Chrome) or 626 (Satin Chrome) finishes. Please order 629 (Bright Stainless Steel) or 630 (Satin Stainless Steel) instead.  
\*Although these products are better designed for behavioral health applications than traditional trim, they do not eliminate the risk that an object can be affixed to, or around them.

# Behavioral Health Lever Trim

ML2000




## BLSS\*

The BLSS trim is part of the Behavioral Health Series™ of products. With an array of functions, this trim can be used on virtually any opening in healthcare applications. Sloping surfaces and overlapping rose and lever address safety concerns common in behavioral health. Optimal for tough environments, the ML2000 mortise lock provides impressive strength and reliability.

Refer to the Specialty Hardware Catalog (45205) for more information.




**BLSS**  
Stainless Steel

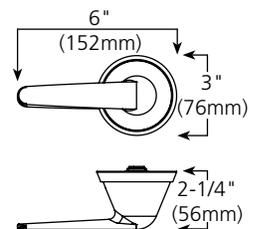

## Thumbturn - BLSS

Stainless Steel  
Door thickness: 1-3/4" (44mm)  
through 2-1/4" (57mm)

(Not available with Occupancy Indicator)

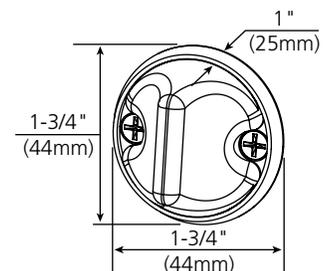

## How to Order

### BLSS

Quantity	Series/Function	Trim	Finish**	Hand
100	ML2010	BLSS	630	RHR

\*\* BLSS is not available in 625 (Bright Chrome) or 626 (Satin Chrome) finishes. Please order 629 (Bright Stainless Steel) or 630 (Satin Stainless Steel) instead.

\*Although these products are a better design for behavioral health applications than traditional trim, they do not eliminate the risk that an object can be affixed to, or around them.

# Push/Pull Trim

## ML2000



U.S. Patent Numbers: D646,548S; D646,549S

### HPSK


The ML2000 mortise lock with push/pull paddle trim provides an aesthetically pleasing alternative to products with standard push/pull trim. Its heavy-duty design and ANSI/BHMA Grade1 strength help it to withstand abuse from rigorous environments. Multiple mounting orientations, hands free operation and a sleek, aesthetic form, make the ML2000 mortise lock ideal for use in healthcare facilities and educational facilities.

Refer to the Specialty Hardware Catalog (45205) for more information.



#### HPSK


Covers: Cast stainless steel or brass  
Paddles: Cast stainless steel or brass  
Specify hand.

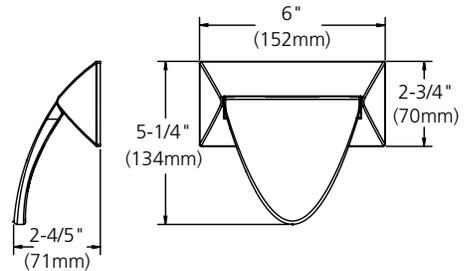

#### Thumbturn - HPSK

Brass or Stainless Steel  
Door thickness: 1-3/4" (44mm) through 2-1/4" (57mm).

(Not available with Occupancy Indicator)

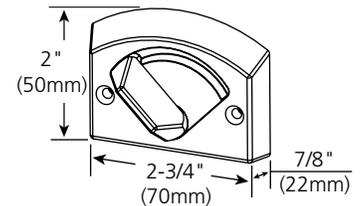

#### Laser Engraving - HPSK

Brass or stainless steel  
Offered on all 3 paddle orientations  
2-1/2" w x 2-1/2" h max laser engraving area  
(See Custom Laser Engraving brochure for more details)

### How to Order

#### HPSK Push/Pull

Quantity	Series/Function	Trim	Finish*	Hand
100	ML2010	HPSK	630	RHR

\* HPSK is not available in 625 (Bright Chrome) or 626 (Satin Chrome) finishes. Please order 629 (Bright Stainless Steel) or 630 (Satin Stainless Steel) instead.

# Anti-Harm Trim

ML2000



## Anti-Harm Knob HSS

The anti-harm knob is designed for safety and security by eliminating catch points with a tapered knob recessed into the rose, a tapered thumbturn (for mortise lock thumbturn functions) with Torx® pin security screws, tapered cylinder collars and concealed mounting screws. Available as sectional trim, the anti-harm knob features recessed finger holes for a better grip and the reliability of the ML2000 ANSI/BHMA grade 1 mortise lock. Ideal for psychiatric or detention facilities.

Refer to the Specialty Hardware Catalog (45205) for more information.



### Anti-Harm Knob HSS


Brass

Knob: Brass

Door thickness: 1-3/4" (44mm) through 4" (102mm) in 1/4" increments.

Finishes: 606, 626, and 626C


Notes: On lever trim x HSS Knob, the outside lever will be retained with a set screw.  
HSS Knob is only available with the rose shown. No optional roses or escutcheons.

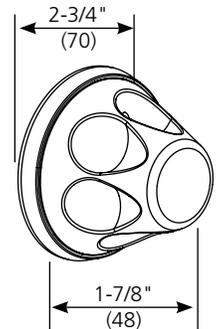

### Thumbturn - HSS

Standard for all ML2000 x HSS thumbturn functions

(Not available with Occupancy Indicator)

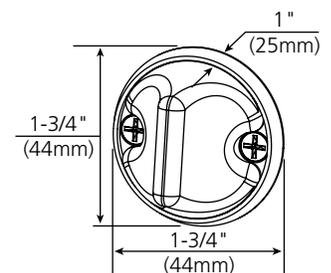

## How to Order

### Anti-Harm Knob (HSS) Trim – HSS Knob x HSS Knob


Quantity	Series/Function	Trim	Finish	Hand
6	ML2032	HSS	626	RH

### Anti-Harm Knob (HSS) Trim – Lever Trim x HSS Knob

Quantity	Series/Function	Trim		Finish	Hand
		Outside	Inside		
6	ML2055	NSA	HSS	626C	RH

# Options & Accessories

## ML2000

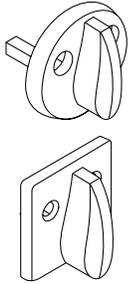

### Standard Thumbturn

Cast brass or bronze. Standard on functions utilizing thumbturn. Sectional Trim.

**Turn Size:** 1-1/4" (32mm)


**Spindle Size:** 3/16" (5mm)

**Plate Size:** 1-3/8" (35mm)

Surface screw mounted To order separately, see table.

- Available with Standard, Muséo and Vineyard levers
- Rose design will designate shape of thumbturn backplate
  - E2, E3 and E4 roses - square backplate

Door	Packet	
	Round	Square
1-3/8" (35mm)	519F09 x FIN	814F10 x FIN
1-3/4" (44mm)	519F10 x FIN	814F11 x FIN
2-1/4" (57mm)	519F11 x FIN	814F12 x FIN
Up to 4" (102mm)	581F96 x FIN	814F13 x FIN

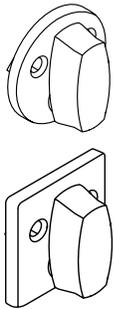

### Decorative Thumbturn MT1

Cast bronze or stainless steel. Used on functions utilizing a thumbturn. Sectional trim only.

To order with lock and trim, specify Quick Code MT1.


To order separately, see table.

**Turn Size:** 1-3/10" (33mm)

**Plate Size:** 1-1/2" (38.1mm)

- Available with Standard, Muséo and Vineyard levers
- Rose design will designate shape of thumbturn backplate
  - Round roses - round backplate
  - E2, E3 and E4 roses - square backplate

Door	Packet	
	Round	Square
1-3/8" (35mm)	723F70Mx F IN	723F71M x FIN
1-3/4" (44mm)	723F76Mx F IN	723F77M x FIN
2-1/4" (57mm)	723F88Mx F IN	723F89M x FIN
Up to 4" (102mm)	723F82Mx F IN	723F83M x FIN

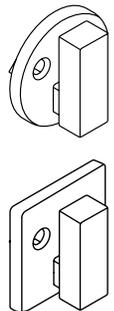

### Decorative Square Thumbturn MT2

Cast bronze or stainless steel. Used on functions utilizing a thumbturn. Sectional trim only.

To order with lock and trim, specify Quick Code MT2.


To order separately, see table.

**Turn Size:** 1-3/10" (33mm)

**Plate Size:** 1-1/2" (38.1mm)

- Available with Standard, Muséo and Vineyard levers
- Rose design will designate shape of thumbturn backplate
  - Round roses - round backplate
  - E2, E3 and E4 roses - square backplate

Door	Packet	
	Round	Square
1-3/8" (35mm)	723F72Mx F IN	723F73M x FIN
1-3/4" (44mm)	723F78Mx F IN	723F79M x FIN
2-1/4" (57mm)	723F90Mx F IN	723F91M x FIN
Up to 4" (102mm)	723F84Mx F IN	723F85M x FIN

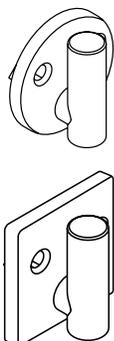

### Decorative Cylinder Thumbturn MT3

Cast bronze or stainless steel. Used on functions utilizing a thumbturn. Sectional trim only.

To order with lock and trim, specify Quick Code MT3.

To order separately, see table.

**Turn Size:** 1-3/10" (33mm)


**Plate Size:** 1-1/2" (38.1mm)

- Available with Standard, Muséo and Vineyard levers
- Rose design will designate shape of thumbturn backplate
  - Round roses - round backplate
  - E2, E3 and E4 roses - square backplate

Door	Packet	
	Round	Square
1-3/8" (35mm)	723F74Mx F IN	723F75M x FIN
1-3/4" (44mm)	723F80Mx F IN	723F81M x FIN
2-1/4" (57mm)	723F92Mx F IN	723F93M x FIN
Up to 4" (102mm)	723F86Mx F IN	723F87M x FIN

# Options & Accessories


## ML2000



### BHSS Thumbturn\*

Stainless steel. Used on functions utilizing a thumbturn. Sectional trim only. To order, see table.  
**Plate Size:** 2-1/4" (57mm) diameter


Door	Packet
1-3/4" (44mm)	813F177 x FIN
2" (51mm)	813F187 x FIN
2-1/4" (57mm)	813F097 x FIN



### BHSS Emergency Turn\*

Stainless steel. Used on functions utilizing a thumbturn. Sectional trim only. To order, see table.  
**Plate Size:** 2-1/4" (57mm) diameter


Door	Packet
1-3/4" (44mm)	813F747 x FIN
2" (51mm)	813F757 x FIN
2-1/4" (57mm)	813F767 x FIN



### BLSS & HSS Thumbturn\*

Cast bronze or stainless steel. Used on functions utilizing a thumbturn. Sectional trim only. To order, see table.  
**Plate Size:** 1-3/4" (44mm) diameter


Door	Packet
1-3/4" (44mm)	723F04 x FIN
2" (51mm)	723F05 x FIN
2-1/4" (57mm)	723F06 x FIN



### BLSS & HSS Emergency Turn\*

Stainless steel. Used on functions utilizing a thumbturn. Sectional trim only. To order, see table.  
**Plate Size:** 1-3/4" (44mm) diameter


Door	Packet
1-3/4" (44mm)	813F92M x FIN
2" (51mm)	813F93M x FIN
2-1/4" (57mm)	813F94M x FIN



### HPSK Thumbturn\*

Cast bronze or stainless steel. Used on functions utilizing a thumbturn. Sectional trim only. To order, see table.  
**Plate Size:** 2-3/4" (70mm) x 2" (50mm)

Door	Packet
1-3/4" - 2" (44-51mm)	811F91M x FIN
2-1/4" (57mm)	811F92M x FIN



### HPSK Emergency Turn\*


Stainless steel. Used on functions utilizing a thumbturn. Sectional trim only. To order, see table.  
**Plate Size:** 2-3/4" (70mm) x 2" (50mm)

Door	Packet
1-3/4" - 2" (44-51mm)	812F97M x FIN
2-1/4" (57mm)	812F98M x FIN

\* Not available with Occupancy Indicators

# Options & Accessories

## ML2000




### Ergonomic Thumbturn

Cast brass or bronze. Large profile and offset center makes it easier to grasp and rotate. Available on both sectional and escutcheon trim. To order with lock and trim, specify Quick Code M34. To order separately, see table.

Note: Not available with the M19N, M19SN, or M19VN indicators. Not available with HPSK trim.

Door	Packet
Escutcheon Trim up to 4" (102mm)	711F002
Sectional Trim	
1-3/8" (35mm) - 1-5/8" (41mm)	707F57 x FIN
1-3/4" (44mm) - 2" (51mm)	707F58 x FIN
2" (51mm) - 2-1/4" (57mm)	707F59 x FIN
2-3/8" (60mm) - 3" (76mm)	707F60 x FIN
3" (76mm) - 4" (102mm)	706F70 x FIN



### Key Plate

Cast brass or bronze. Standard for privacy function with emergency release only. Sectional Trim.  
**Plate Size:** 1-3/8" (35mm) diameter. To order separately, specify Packet 438F90 x Finish.




### Hotel Occupancy Indicators

For use with ML2029 hotel locks. Furnished only when ordered. When door is locked from inside, push button cannot be depressed, indicating that the room is occupied. To order specify quick code M19. For use with sectional trim designs having 2-7/8" (73mm) maximum rose diameter. Cylinder collar and indicator combined.

**Size:** 3-1/16" (78mm) x 1-3/4" (44mm). To order separately, see table. For use with escutcheon designs only. Indicator is fastened to escutcheon at factory. It is included for illustration purposes only and is not sold separately.


Collar and Indicator Assembly	
Door	Packet
1-3/8" (35mm)	429F08 x FIN
1-3/4" (44mm)	416F84 x FIN
2-1/4" (57mm)	484F74 x FIN



### Tapered Cylinder Collar

Furnished only for CSV or NSV trims with 1-1/4" cylinders, double cylinder functions or with 1-1/2" cylinders, single cylinder functions.\*

\*1-3/4" thick doors. Only used with VR trims.



### Square Cylinder Collar

Included when ordering Muséo® E2, E3 and E4 square/rectangular roses. Used on all cylinder functions.

**Size:** 1-5/8" (41mm) square  
Contact TPS to determine correct collar size.

### Occupancy Indicators\*

Occupancy indicators for use with ML2000 x sectional trim. Design features option for dual indicators on double cylinder functions, confirming door is secured from either side. Emergency override standard for all non keyed functions.

#### Features:


- Design eliminates unauthorized entry via indicator tampering
- Non keyed indicators available with emergency slot turn override
- Use with both keyed and non-keyed functions
- For use outside, inside or both sides of door
- Choose outside indicator text: Vacant/Occupied or Secure/Unsecure
- Inside indicators always read Secure/Unsecure
- Torx pin security fasteners (standard with cylinder indicators)



#### Indicators – Keyed Functions

- Can be used on either side of door for double cylinder functions
- Compatible with select sectional trim rose designs: A, B, W, X, Y

Secure		Vacant	
Door	Packet	Door	Packet
1-3/8" (35mm)	720F21 x Finish	1-3/8" (35mm)	741F21 x Finish
1-3/4" (44mm) - 2" (51mm)	720F22 x Finish	1-3/4" (44mm) - 2" (51mm)	741F22 x Finish
2-1/4" (57mm)	720F24 x Finish	2-1/4" (57mm)	741F23 x Finish
Over 2-1/4" (57mm)	720F25 x Finish	Over 2-1/4" (57mm)	741F24 x Finish



Inside Indicator



Outside Indicator


#### Indicators – Non Keyed Functions

- Inside Indicator always reads Secure/Unsecure
- Outside Indicator features slot-turn emergency override
- Compatible with all sectional trim rose designs: A, B, C, D, E, F, G, T, U, V, W, X, Y

Secure		Vacant	
Door	Packet	Door	Packet
1-3/8" (35mm)	721F16 x Finish	1-3/8" (35mm)	720F61 x Finish
1-3/4" (44mm) - 2" (51mm)	721F17 x Finish	1-3/4" (44mm) - 2" (51mm)	720F62 x Finish
2-1/4" (57mm)	721F18 x Finish	2-1/4" (57mm)	720F64 x Finish
Over 2-1/4" (57mm)	721F19 x Finish	Over 2-1/4" (57mm)	720F65 x Finish

#### Thumbturn Indicator

- Located on the inside of the door and reads secure/unsecure
- Built into the occupancy indicator
- Only available in ML2013, ML2017, ML2020, ML2024, ML2029, ML2030, ML2048, ML2060, ML2065, ML2067, ML2068, ML2069 and ML2075 functions

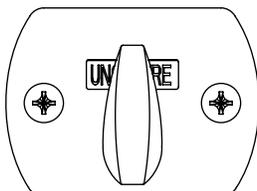

Door	Packet
1-3/8" (35mm)	723F69 x Finish
1-3/4" (44mm) - 2" (51mm)	723F26 x Finish
2-1/4" (57mm)	791F59 x Finish
Over 2-1/4" (57mm)	791F60 x Finish

\* Not available with BHSS or BLSS Trim

# Options & Accessories

## ML2000

### Occupancy Indicator Quick Codes and Functions

Quick Code	Outside	Inside	ML2002	ML2003	ML2011	ML2012	ML2013	ML2017	ML2020	ML2022	ML2024	ML2029	ML2030	ML2048	ML2059	ML2060	ML2062	ML2065	ML2067	ML2068	ML2069	ML2072	ML2073	ML2075	ML2082	ML2092	
<b>Single Indicator</b>																											
M19S	Secure/Unsecure	—	X	X	X	X	X	X		X	X	X		X	X		X	X	X	X	X	X	X	X	X	X	X
M19V	Vacant/Occupied	—	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
M19N	—	Secure/Unsecure	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
<b>Double Indicator</b>																											
M19SN	Secure/Unsecure	Secure/Unsecure	X	X	X	X	X	X		X	X	X		X	X		X	X	X	X	X	X	X	X	X	X	X
M19VN	Vacant/Occupied	Secure/Unsecure	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

#### How to Order:

##### **ML2060 x NSA x 626 x RH x M19V**

Non keyed function x sectional trim x outside indicator with slot turn (text reads Vacant/Occupied)

##### **ML2072 x NSA x 626 x RH x M19SN x PHS x KA**

Double cylinder x sectional trim x outside indicator (Secure/Unsecure) x inside indicator (Secure/Unsecure) x keyed alike

# Options and Accessories

## ML2000, ML20900 ECL and ML20600 NAC

### Cylinders

2 nickel silver keys

Finishes: See Key Systems catalog



Interchangeable Core (I.C.)  
Shown

Mortise Cylinder Type	Quick Code	Hotel Function	42 (inside) 52, 53, 55, 56, 58, 69 Functions	All Other Keyed and 42 (outside) Functions
Access 3® Patented	AP	1501-114-A01	1500-114-A02	1500-114-A01
Access 3® Security	AS	1601-114-A01	1600-114-A02	1600-114-A01
Access 3® High Security	AHS	1701-114-A01	1700-114-A02	1700-114-A01
Access 3® Patented IC	ACP	N/A	1580-114-A02	1580-114-A01
Access 3® Security IC	ACS	N/A	1680-114-A02	1680-114-A01
Access 3® High Security IC	ACHS	N/A	1788-114-A02	1788-114-A01
Pyramid HS	PHS	N/A	1020-114-A02	1020-114-A01
Pyramid HS IC	PCHS	N/A	1030-114-A02	1030-114-A01
Pyramid Security	PS	N/A	1027-114-A02	1027-114-A01
Pyramid Security IC	PCS	N/A	1037-114-A02	1037-114-A01
Conventional 6-pin	N/A	1001-114-A01	1000-118-A02	1000-118-A01
Conventional 7-pin	7P	N/A	1000-114-A02-7	1000-114-A01-7
6-pin IC	C6	1081-138-A01	1080-114-A02	1080-114-A01
7-pin IC	C7	N/A	1080-112-A02-7	1080-112-A01-7
Security	HS	1011-114-A01	1010-118-A02	1010-118-A01
Security IC	CHS	1091-138-A01	1090-114-A02	1090-114-A01
Flex head 6-pin	FX6	1101-118-A01	1100-100-A02	1100-100-A01
Flex head 7-pin	FX7	N/A	1100-118-A02-7	1100-118-A01-7
Master ring**	MR	N/A	1060-118-A62	1060-118-A61
Master ring flex head**	FXM	N/A	1160-100-A62	1160-100-A61
Blockout	BO	N/A	1012-114-A02	1012-114-A01
Plug only to show 6-pin	P06	1201-114-A01	1200-118-A02	1200-118-A01
Plug only to show 7-pin	P07	N/A	1200-114-A02-7	1200-114-A01-7

To order optional cylinder with lockset, see Quick Codes, page 69.  
To order cylinder separately, specify Part No. x Keyway x Finish (e.g., 1000-118-A01 x L4 x 626).

(HS) Indicates cylinder is available with ML2000HS lockset.


(VR) Indicates function is available with vandal resistant ML2000VR lockset.

\*\*Not available for ML2017, ML2029, ML2060, ML2061, ML2068, ML2069, ML2032 x MR, ML2000HS, ML2000VR, ML20900 and P escutcheons (all functions).

**Note: Master ring cylinder meets ANSI/BHMA operational Grade 1.**

### Plug only to show (concealed shell)

Only the cylinder plug face is visible when lock trim is in place. Available with "M", "R", and "L" escutcheons. See individual trim designs for availability.

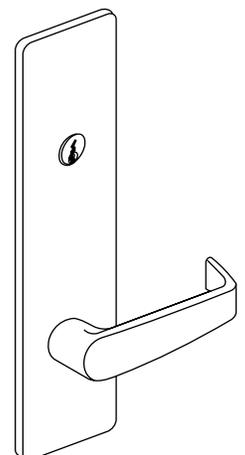

# Options and Accessories

## ML2000, ML20900 ECL and ML20600 NAC

### Strikes

#### ANSI Straight Lip (standard)

Brass, bronze or stainless steel

Non-handed

4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/8" (29mm) lip to center (standard)

Optional lip lengths: 7/8" (22mm), 1"

(25mm), 1-1/8" (29mm), 1-1/4" (32mm),

1-3/8" (35mm), 1-1/2" (38mm), 1-3/4"

(44mm), 2" (51mm), 2-1/4" (57mm),

2-1/2" (64mm), 2-3/4" (70mm), 3" (76mm)

#### ANSI Curved Lip

Brass, bronze or stainless steel

Handed

4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/4" (32mm) lip to center (standard)

Optional lip lengths: 1-1/8" (29mm), 1-3/8"

(35mm), 1-1/2" (38mm), 1-3/4" (44mm), 2"

(51mm), 2-1/4" (57mm), 2-1/2" (64mm),


2-3/4" (70mm), 3" (76mm)

#### ANSI Wrought Strike Box

To order with lockset, see

Quick Codes, page 70.

To order separately, specify 120F76.



#### Open Back

Size: 5-1/4" (133mm) x 1/4" (32mm).


Note: Only Available with ML2000



LH Shown

Latchbolt x Deadbolt

Part No.	Description
236L72	Straight Lip
340L60	Curved Lip for RH/LHR
340L61	Curved Lip for LH/RHR



LH Shown


Latchbolt Only

236L73	Straight Lip
340L62	Curved Lip for RH/LHR
340L63	Curved Lip for LH/RHR



Deadbolt Only

236L74	Straight Lip
--------	--------------



Blank Filler Plate


236L70	Straight Lip
--------	--------------

To order strike with lockset, see How to Order, page 66.

To order strike separately, specify Part No. x Lip Length x Finish (e.g., 340L60 x 1-1/2" x 626).

Hand	Door Thickness	Part
LHR	1-3/4" (44mm)	411L63 016
	2" (51mm)	411L63 018
	2-1/4" (57mm)	411L63 020
RHR	1-3/4" (44mm)	411L62 016
	2" (51mm)	411L62 018
	2-1/4" (57mm)	411L62 020

To order with lockset, see Quick Codes, page 70. To order separately, specify Part No. x Door Thickness x Finish (e.g., 411L62 x 2" x 626).



#### Rabbeted Front and Strike

Brass or bronze


For 1/2" (13mm) rabbet

No optional lip lengths

	Part No.	Hand
Latchbolt x Deadbolt	318F66	RH/LHR
	318F69	LH/RHR
Latchbolt only	318F64	RH/LHR
	318F67	LH/RHR
Deadbolt only	318F65	RH/LHR
	318F68	LH/RHR

To order with lockset, see Quick Codes, page 70.

To order separately, specify Part No. x Finish (e.g., 318F66 x 626).



# Options and Accessories

## ML2000, ML20900 ECL and ML20600 NAC

### BPS Power Supply

#### Operation

Power supplies are designed to provide reliable filtered and regulated power for long life to a variety of electrified hardware components. All modular power supplies are designed to meet UL 1481 Standards. Recommended for the ML20900, delayed egress exit devices and electric trim.

#### Features

- Fire panel emergency release input
- PC Board mounted system LED indicator
- Regulated and filtered with input and output protection
- Battery charging is provided from a separate output terminal

#### Electrical Specifications


- Inputs: 115VAC @600mA
- Outputs: 12/24 VDC @ 1 Amp, 1.5 Amp or 4 Amp, Filtered and regulated output

#### Listings

- UL & cUL listed 1012 General Purpose Power Supply
- Fire & Burglar Alarm Power Supply Unit URT2
- Releasing device Accessory SYSW
- Access Control Systems Units ALVY
- Burglar Alarm Systems Power Supply APHY

#### Applications

- D – Delayed Egress
- M97 – Electric Dogging
- SAF – Fail Safe mortise device trim control
- SEC – Fail Secure mortise device trim control
- ML20900

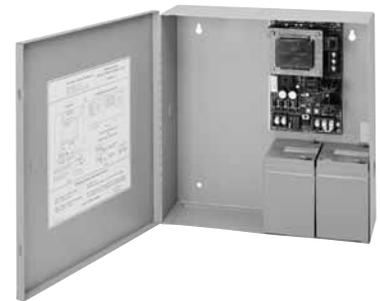

Note: Batteries are not included with the BPS power supply

Model	Enclosure	Input	Output
BPS-24-1	12" (304mm) x 9" (229mm) x 4" (102mm)	115VAC, 50/60 Hz.	1 Amp @ 24 VDC
BPS-24-2	14" (356mm) x 14" (356mm) x 4" (102mm)	115VAC, 50/60 Hz.	2 Amp @ 24 VDC
BPS-24-4	15" (381mm) x 18" (457mm) x 6" (152mm)	115VAC, 50/60 Hz.	4 Amp @ 24VDC
BPS-12-1	12" (304mm) x 9" (229mm) x 4" (102mm)	115VAC, 50/60 Hz.	1 Amp @ 12 VDC
BPS-12-3	14" (356mm) x 14" (356mm) x 4" (102mm)	115VAC, 50/60 Hz.	3 Amp @ 12 VDC

### Requirements for Electrical and Data Transfer

To answer the demand for "smart" electronic access control and locking solutions that require fast, easy, and cost-effective installation, ASSA ABLOY Group brands use the ElectroLynx® standardized plug-in connectors and color-coded wiring system.

With *ElectroLynx*, doorway components come pre-wired for easy hookup to the power source. The key to the system is the transfer device hinge that carries power from the frame to the locking hardware.

#### Features of ElectroLynx:

- Makes it easy to bring power to the locking hardware
- Wires have connectors that snap together, like plugging a telephone into a jack


To connect a ML20900 electrified mortise lock to the electronic access control system, the following items are required:

- ML20900 electrified mortise lock
- ASSA ABLOY Door Group pre-wired door, or *ElectroLynx* retrofit cable (order from McKinney)

- Electronic transfer device (*ElectroLynx* electronic transfer hinge or Electrical Power Transfer with standard hinge, from McKinney)
- *ElectroLynx* cable from the hinge to above the ceiling (order from McKinney)

Information regarding cable selection, hinge requirements and order strings can be found in the McKinney Transfer Device Solutions catalog. Consult 800-810-WIRE (9473) with questions on application specifications and requirements.

The McKinney QC8 ElectroLynx Hinge is recommended for all ML20900 functions and electrified options.

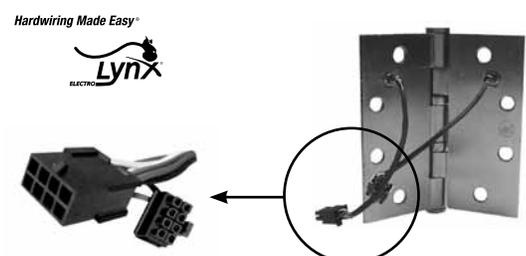


# Electrified Options & Accessories

## ML20900 ECL and ML20600 NAC

### Exit Controls and Switches

#### Key Switches




**MKA**

MKA - (1) SPDT Maintained  
 MK - (1) SPDT Momentary  
 MKN - (1) SPDT Momentary NS  
 MK2 - (1) DPDT Momentary  
 MKPZ x MKS - (1) SPDT Momentary with audio Double Gang x Additional Switch  
 Note: All key switches come standard with 12/24 VDC bi-color LED.


#### Specifications

- Keyswitch for operation using a standard 1-1/8" mortise cylinder (A02 cam) (cylinder not included).
- Contact Rating 5 Amps @ 12-24VDC
- SPDT 3-position.

#### Push Buttons



**PB2**



**PB3**

PB2 - (1) SPDT Momentary  
 PB2 - (1) DPST Remote Momentary  
 PB3 - (1) DPST Momentary  
 PB3A - (1) DPST Maintained (Alt. Action)  
 PB3EA - (1) DPST Alternate

#### Specifications

- 3 Amps @ 12-24 VDC

#### Indicator

ZLP - (1) Red and Green LED on narrow gang plate.

#### Audible/Visual Annunciators



**PZ1**

PZ1 - Sonalert 90db @ 2ft. 12-24VDC.  
 Mounted on one gang stainless steel plate.

#### Digital Entry

DK-11 - Digital Keypad - 4 User  
 DK-26SS - Digital Keypad NS - 59 User - SS Finish  
 DK-26BK - Digital Keypad NS - 59 User - Black Finish


#### Power Transfers

TSB B-C - Door Cord

### Electric Accessories

Description
Power supply 1.0 Amp @ 12 VDC output
Power supply 3.0 Amp @ 12 VDC output
Power supply 1.0 Amp @ 24 VDC output
Power supply 2.0 Amp @ 24 VDC output
Power supply 4.0 Amp @ 24 VDC output

### Ordering Examples - ML2000 Series

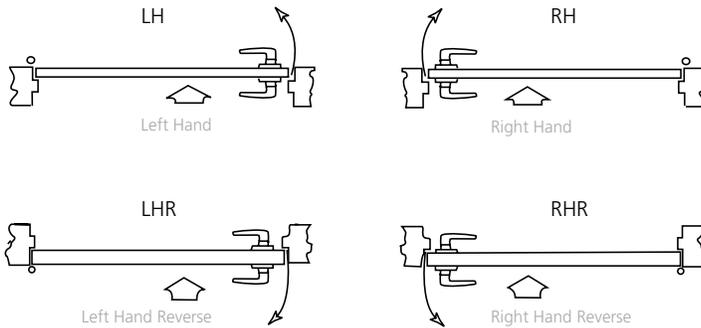

Note: Arrow indicates secure side of door.

### Where to find ordering information and Quick Codes

ML2000 Series/Function	5-9
ML20900 ECL Series/Function	13
Trim Designs	14-54
Cylinder and Keying	69
Finish	69
Strikes	70
Miscellaneous Options	70
Door Thickness	70
Handing	71

### Stock Order

Quantity	Series/Function	Trim	Finish	Hand
100	ML2055	LWA	626	RHR
50	ML2055HS	SST	626	LHR

### Split Trim / Finish Order

Quantity	Series/Function	Trim		Finish		Hand
		Outside	Inside	Outside	Inside	
12	ML2055	LWA	GRC	626	625	RHR
6	ML2055HS	SST	—	626	606	LHR
12	ML2055	ZSL	—	626	625	RHR
24	ML2051	MSG	—	605	625	LH
12	ML2055	102U	—	626	606	RHR
24	ML2051	122R	110R	605	625	LH

### Contract / Detailed Order

Quantity	Keyset	Series/Function	Trim	Finish	Hand	Door Thickness	Optional Strike	Misc. Options	Optional Cylinder	Keying
24	AA1	ML2055	LWA	626	RHR	D214	SA200	M17-M26	C7	VKC3
12	AA1	ML2055HS	SST	626	LHR	D214	SS200	M07	C6	VKC1
6	AA1	ML2055VR	NSV	630	RH	D214	SS114	M17	PCHS	VKC1

### Working Trim Only

Quantity	Function Only	Trim	Finish	Hand	Door Thickness	Misc. Options
6	ML2055	LWA	626	RHR	D214	M31
3	ML2055HS	SST	626	LHR	D214	M31
1	ML2055VR	NSV	630	RH	D214	M31

(Includes grip and spindle, rose or escutcheon, thumbturn lever, emergency key plate, adapters and screws)

# How To Order

## ML2000 and ML20900 ECL

### Lock Only (Includes lock case, armored front, strike and screw pack)

Quantity	Series/ Function	Trim*	Finish	Hand	Door Thickness	Optional Strike	Misc. Options
6	ML2055	LL	626	RHR	D138	SS078	M17
3	ML2055HS	KK	626	LHR	D214	SA200	M29

\*TRIM KEY  
 KK Knob x Knob  
 LL Lever x Lever  
 LK Lever x Knob  
 KL Knob x Lever  
 HL Lever Inside Only  
 HK Knob Inside Only

### Ordering Examples - ML20900 ECL Series

#### Lock Only (Includes lock case, armored front, strike and screw pack)

Quantity	Series/ Function	Trim*	Finish	Hand	Fail Safe/ Fail Secure	Misc. Options
6	ML20914	LL	626	RHR	SAF	M105


\*TRIM KEY  
 KK Knob x Knob  
 LL Lever x Lever  
 LK Lever x Knob  
 KL Knob x Lever  
 HL Lever Inside Only  
 HK Knob Inside Only

#### Contract / Detailed Order

Quantity	Keyset	Series/ Function	Trim	Finish	Hand	Fail Safe/ Fail Secure	Misc.Options	Optional Cylinder	Keying
24	AA1	ML20914	LWA	626	RHR	SEC	M20	7P	VKC3

# How to Order the Muséo® Piet Levers

## ML2000 and ML20900 ECL

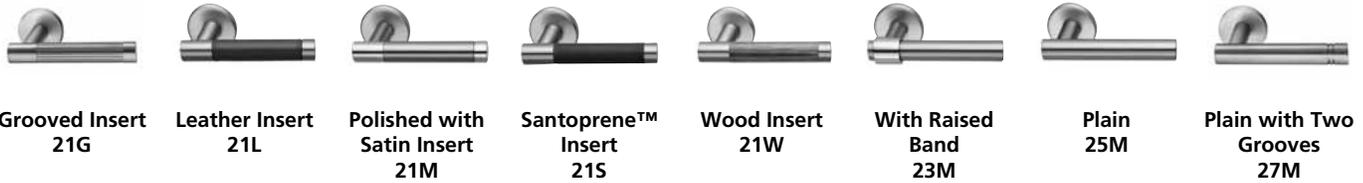

### Piet Finish Codes

ANSI/BHMA Finish	Piet Code*	Description
630	30	Satin Stainless Steel
629	29	Bright Stainless Steel
N/A	BH	Wood insert
N/A	BK	Black (Santoprene™ or leather insert)
N/A	BN	Brown (leather insert)
N/A	00	No Insert

\*Code used to specify Piet Collection finishes only. Use available finishes list to specify desired finish when ordering.

### Piet Lever Descriptions & Available Finishes

Lever Designation	Lever Description	Available Finishes (as ordered)
21G	Grooved Insert	292929 or 303030
21L	Leather Insert	29BK29, 29BN29 or 30BK30, 30BN30
21M	Metallic Insert	293029** only
21S	Santoprene Insert	29BK29 or 30BK30
21W	Wood Insert	29BH29 or 30BH30
23M	Raised Band	290029, 300030 or 290030**
25M	Plain	290029 or 300030
27M	Two Grooves	290029 or 300030

\*\*Two-tone finish - grip of lever is 630, balance of lever is 629. Rose/escutcheon and lock finish will be 629.

### Ordering Examples

Rose Options: E2, E3, E4, T, U, V, W, X, Y

Escutcheon Options: L, R

Quantity	Series/ Function	Trim	Lever Finish	Lock Finish	Hand	Thumbturn Options
2	ML2055	21LU	29BK29	629	RH	MT3
1	ML2051	23ML	290030	629	RH	MT3

# Quick Codes

## ML2000, ML20900 ECL and ML20600 NAC

### Cylinder and Keying

Description	Specify
Conventional 6-pin (HS) (VR)	(standard)
Conventional 7-pin (HS) (VR)	7P
Less cylinder(s) (HS) (VR)	LC
IC 6-pin (HS) (VR)	C6
IC 6-pin with temporary construction core (HS) (VR)	
Red	CT6R
Blue	CT6B
Green	CT6G
IC 6-pin less core (HS) (VR)	CL6
SFIC 6-pin with SFIC disposable temporary core (HS) (VR)	CT6SD
SFIC 6-pin with Less Core <sup>1</sup> (HS) (VR)	CLS6
IC 7-pin (HS) (VR)	C7
IC 7-pin with temporary construction core (HS) (VR)	
Red	CT7R
Blue	CT7B
Green	CT7G
IC 7-pin less core (HS) (VR)	CL7
SFIC 7-pin with SFIC disposable temporary core (HS) (VR)	CT7SD
SFIC 7-pin with Less Core <sup>1</sup> (HS) (VR)	CLS7
Security (HS) (VR)	HS
Security IC (HS) (VR)	CHS
Access 3 - Patented (HS) (VR)	AP
Access 3 - Security (HS) (VR)	AS
Access 3 - High Security (HS) (VR)	AHS
Access 3 IC - Patented (HS) (VR)	ACP
Access 3 IC - Security (HS) (VR)	ACS
Access 3 IC - High Security (HS) (VR)	ACHS
UL IC 6-Pin Housing Less Core	CL6AH
UL IC 6-Pin Housing with Disposable Core	CTAHD
UL IC 6-Pin Housing with (Red/Blue/Green) Temporary Construction Core	CT6AH(R/B/G)
Pyramid High Security Fixed Core (HS) (VR)	PHS
Pyramid High Security IC (HS) (VR)	PCHS
Pyramid IC Less Core (HS) (VR)	CLP
Pyramid with temporary construction core (HS) (VR)	CTP
Pyramid Security (HS) (VR)	PS
Pyramid Security IC (HS) (VR)	PCS
Pyramid Disposable Core (HS) (VR)	CTPD
6-Pin Disposable Core (HS) (VR)	CT6D
7-Pin Disposable Core (HS) (VR)	CT7D
Master ring <sup>2</sup> (HS) (VR)	MR
Blockout function cylinder (HS) (VR)	BO
Flex head cylinder, 6-pin (sectional trim)	FX6
Flex head cylinder, 7-pin (sectional trim)	FX7
Flex head cylinder, master ring <sup>2</sup> (sectional trim)	FXM
Plug only to show, 6-pin (concealed shell; M and R escutcheons only, single cylinder only)	PO6
Plug only to show, 7-pin (concealed shell; M and R escutcheons only, single cylinder only)	PO7
Plug only, less cylinder	PO-LC
Laser Engraving	LASER

(HS) Indicates cylinder is available with ML2000HS lockset

(VR) Indicates availability with ML200VR lockset

ML2000.76

Description	Specify
Keyed random (HS) (VR)	KR
Construction master keyed (not available for Pyramid) (HS) (VR)	CMK
Visual key control (HS) (VR)	
- No keying data stamped on key or cylinder	VKC0
- Keys only	VKC1
- Cylinders and keys (not for HS, CHS, PHS, PCHS, AS, ACS, AHS, or ACHS)	VKC2
- Cylinders only (not for HS, CHS, PHS, PCHS, AP, ACP, AS, ACS, AHS or ACHS)	VKC3
Concealed key control (CKC) (HS) (VR)	
- CKC cylinders with VKC keys	CKC2
- CKC cylinders only (not for HS, CHS, PHS, PCHS, AP, ACP, AS, ACS, AHS or ACHS)	CKC3
2 keys per lock More than 2 keys	(standard) KY# (e.g., KY6)

1. Not available with ML2029.

2. Not available for ML2017, ML2029 or ML2032 x MR, ML2000HS or ML2000VR.

### Finishes

ANSI/BHMA 605 (US3)	(HS)	Bright Brass
ANSI/BHMA 606 (US4)	(HS)	Satin Brass
ANSI/BHMA 611 (US9)	(HS)	Bright Bronze
ANSI/BHMA 612 (US10)	(HS)	Satin Bronze
ANSI/BHMA 613 (US10B)	(HS)	Oxidized Bronze, oil rubbed
613E (US10BE)		Dark Oxidized Satin Bronze - Equivalent
613L		Dark Oxidized Satin Bronze, Clear Coated
ANSI/BHMA 618 (US14)		Bright Nickel Plated
ANSI/BHMA 619 (US15)	(HS)	Satin Nickel Plated
ANSI/BHMA 625 (US26)	(HS)	Bright Chromium Plated
ANSI/BHMA 626 (US26D)		Satin Chromium Plated
626C		Satin Chromium Plated with MicroShield®
ANSI/BHMA 629 (US32)	(HS)	Bright Stainless Steel
ANSI/BHMA 630 (US32D)	(HS) (VR)	Satin Stainless Steel
630C		Satin Stainless Steel with MicroShield®
ANSI/BHMA 722		Black Oxidized Bronze, oil rubbed

### Miscellaneous Options

Description	Specify
Spanner head screws	M02
Torx® head screws (not available for "N" escutcheon trims (Standard for ML2000HS and VR. Optional for other trims)	M04
Blank Escutcheon Inside (only available for ML2000HS and VR, not available for ML2000)	(HS) (VR) M07
ANSI wrought strike box	(HS) (VR) M17
Hotel occupancy indicator (Only available for ML2029)	(VR) M19
Single Occupancy Indicator - Secure/Unsecure (Outside)	M19S
Single Occupancy Indicator - Vacant/Occupied (Outside)	M19V
Single Occupancy Indicator - Secure/Unsecure (Inside)	M19N
Double Occupancy Indicator - Secure/Unsecure (Outside) Secure/Unsecure (Inside)	M19SN
Double Indicator Vacant/Occupied (Outside) Secure/Unsecure (Inside)	M19VN
*Knurling outside and inside	(VR) M20
*Knurling outside only	(VR) M21
*Knurling inside only	(VR) M22
*Abrasive coat outside and inside	(VR) M23
*Abrasive coat inside only	(VR) M24
*Abrasive coat outside only	(VR) M25
Non-ferrous lockcase (ML2000 only)	M26
Lead-wrapped case	(HS) (VR) M29
Half trim (for ML2010, ML2020, ML2022, ML2024, ML2029, ML2030, ML2032, ML2052, ML2053, ML2055, ML2056, ML2057, ML2058, ML2059, ML2062, ML2065) (Supplied with inside trim only. Includes cylinder)	M30
Working trim only	(HS) (VR) M31
Latch hold back (for ML2042, ML2052, ML2055, ML2051, ML2057 only)	LHB**
Tapered Cylinder Collar (HPSK only)	M111

\*Not available with Vineyard™ or Muséo® levers.

\*\* Must use A02 cam when LHB is specified

### Door Thickness

Door Thickness	Sectional Trim - Specify	Escutcheon* Trim - Specify
1-3/8" (35mm)**	D138	D138
1-3/4" (44mm)	(standard)	(standard)
1-7/8" (48mm)	D178	D178
2" (51mm)	D200	D200
2-1/8" (54mm)	D218	D218
2-1/4" (57mm)	D214	D214
2-3/8" (60mm)	D238	D238
2-1/2" (64mm)	D212	D212
2-5/8" (67mm)	D258	D258
2-3/4" (70mm)	D234	D234
2-7/8" (73mm)	D278	D278
3" (76mm)	D300	D300
3-1/8" (79mm)	D318	D318
3-1/4" (83mm)	D314	D314
3-3/8" (86mm)	D338	D338
3-1/2" (89mm)	D312	D312
3-5/8" (92mm)	D358	D358
3-3/4" (95mm)	D334	D334
3-7/8" (98mm)	D378	D378
4" (102mm)	D400	D400

\* For 2-3/8" (60mm) to 4" (102mm) door thickness: throughbolts and thumbturn lever spindle for 4" door will be provided; may be field cut. "R" & "L" escutcheons only available 1-3/8" (35mm), 1-3/4" (44mm), and 2-1/4" (57mm).

\*\* 1-1/16" (27mm) front standard for 1-3/8" (35mm) door

(VR) Vandal Resistant trim accommodates doors 1-3/4" (44mm) to 2-1/4" (57mm). Door thicknesses other than 1-3/4" (19mm) must be specified.

### Strikes

Available for ML2000HS and ML2000VR

ANSI Lip to Center	ANSI Straight Lip Specify	Curved Lip Specify
7/8" (22mm)	SS078	N/A
1-1/8" (29mm)	(standard)	SA118
1-1/4" (32mm)	SS114	SA114
1-3/8" (35mm)	SS138	SA138
1-1/2" (38mm)	SS112	SA112
1-3/4" (44mm)	SS134	SA134
2" (51mm)	SS200	SA200
2-1/4" (57mm)	SS214	SA214
2-1/2" (64mm)	SS212	SA212
2-3/4" (70mm)	SS234	SA234
3" (76mm)	SS300	SA300
Open Back Strike	Door Thickness	Specify
	1-3/4" (44mm)	SB134
	2" (51mm)	SB200
	2-1/4" (57mm)	SB214
Rabbeted front and strike	–	Specify SR118

# Quick Codes

## ML2000, ML20900 ECL and ML20600 NAC

### Handing

Hand	Specify
Right Hand	RH
Left Hand	LH
Right Hand Reverse	RHR
Left Hand Reverse	LHR

### Fail Safe/Fail Secure

Description	Specify
Fail safe	SAF
Fail secure	SEC

### Electric Monitor Options (ML20900 Series Only)

Description	Specify
Latchbolt Monitor	M91
Request to Exit	M92
Security Monitor	M105

These options may be ordered together only as follows:  
M91xM92, M92xM105.

### Panel Applications (Material added to the door face, increasing the overall door thickness)

Description	Specify
Centerline of lockcase to edge of panel not to exceed 2"	PNL

### Thumbturns

Description	Specify
Ergonomic	M34
Decorative	MT1
Decorative Square	MT2
Decorative Cylinder	MT2

See page 40 for images of decorative thumbturns

### Electric Accessories

Description	Specify
Power supply 1.0 Amp @ 12 VDC output	BPS-12-1
Power supply 3.0 Amp @ 12 VDC output	BPS-12-3
Power supply 1.0 Amp @ 24 VDC output	BPS-24-1
Power supply 2.0 Amp @ 24 VDC output	BPS-24-2
Power supply 4.0 Amp @ 24 VDC output	BPS-24-4

### EcoFlex™ Mortise Lock End-of-Line Resistors and Deadbolt Privacy Quick Code

Description	Specify
No End-of-Line Resistors	Blank
Mercury / Lenel 1KΩ/2KΩ	R01
Software House 1KΩ/2KΩ	R03
AMAG 4-State Supervision	R04
Deadbolt Privacy	PHR
Deadbolt Privacy and Mercury / Lenel 1KΩ/2KΩ	PHRR01
Deadbolt Privacy and Software House 1KΩ/2KΩ	PHRR03
Deadbolt Privacy and AMAG 4-State	PHRR04

### ML2000 Series Suggested Specification

All locksets shall be ML2000 Series Mortise Locksets as manufactured by Corbin Russwin Architectural Hardware.

Locks shall have all functions available in one size case, manufactured from heavy gauge steel, minimum thickness 3/32" (2mm). The handing of all locks shall be reversible without the disassembly of the lockcase. Cases are to be closed on all sides to protect internal parts. Locks are to have adjustable, beveled and armored fronts, standard 2-3/4" (70mm) backset, a full 3/4" (19mm) throw two-piece mechanical anti-friction latchbolt, and a one-piece stainless steel 1" (25mm) throw deadbolt, and shall be available for a minimum door thickness of 1-3/8" (35mm). Internal parts shall be heavygauge steel, zinc dichromate plated for corrosion resistance.

All locksets with latchbolts, regardless of trim, shall be listed by Underwriters Laboratories for A label and lesser class doors, 4' x 10' single or 8' x 10' pair.

Locksets to be used on specified exterior doors or doors subject to special atmospheric conditions (roofs, pool areas, chemical laboratories, sewage disposal plants, etc.) shall have non-ferrous lock cases and critical internal components.

Cylinder options shall include master ring, flexible head, concealed shell, interchangeable core, security, blockouts, Pyramid and Access 3 types.

Lock trim (knob, lever, sectional or escutcheon) shall be throughbolted through the lockcase to ensure correct alignment and proper operation.

Certification:

UBC - 7 - 2 and UL10C - Positive Pressure

Federal Specification FF-H-106G  
ANSI/BHMA A156.13 Series 1000, Grade 1  
ANSI/BHMA A117.1, Accessibility Code (formerly Title 19, California State Fire Marshal Standard) (lever handle trim).

All locks, trim, and cylinders shall be from one manufacturer.

All locksets shall carry a ten-year limited warranty.

### ML2000 Series Mortise Locks with BHSS and BLSS Trim

- A. Ligature Resistant, Mortise: ANSI/BHMA A156.13, Series 1000, Operational and Security Grade 1 mortise type manufactured to accepted OMH requirements with ligature-resistant lever and escutcheon trim. Locksets to be manufactured with a corrosion resistant, formed steel case. Levers and escutcheons are manufactured from stainless steel material. Provide optional lead-lining (lock body), Torx® fasteners, and Antimicrobial coating as specified in Hardware Sets.
- B. Ligature Resistant, Mortise: ANSI/BHMA A156.13, Series 1000, Operational and Security Grade 1 mortise type manufactured to [accepted] [Use with caution] OMH requirements with ligature-resistant lever and rose trim. Locksets to be manufactured with a corrosion resistant, formed steel case. Levers and roses are manufactured from stainless steel material. Provide optional lead-lining (lock body), Torx® fasteners, and Antimicrobial coating as specified in Hardware Sets.

# How To Specify

## ML2000

### ML2000 Series Mortise Locksets with Vandal Resistant Trim Suggested Specification

All locksets shall be ML2000VR Series Mortise Locksets as manufactured by Corbin Russwin Architectural Hardware.

Locks shall have all functions available in one size case, manufactured from heavy gauge steel, minimum thickness 3/32" (2mm). The handing of all locks shall be reversible without the disassembly of the lockcase. Cases are to be closed on all sides to protect internal parts. Locks are to have adjustable, beveled and armored fronts, standard 2-3/4" (70mm) backset, a full 3/4" (19mm) throw two-piece mechanical anti-friction latchbolt, and a one-piece stainless steel 1" (25mm) throw deadbolt, and shall be available for a minimum door thickness of 1-3/4" (44mm). Internal parts shall be heavy gauge steel, zinc dichromate plated for corrosion resistance.

High security escutcheon trim shall be cast (stainless) steel with tapered design top and bottom to resist forced entry, excessive abuse and vandalism. Size to be 8-1/2" (216mm) high x 2-1/8" (54mm)

wide x 5/16" (8mm) thick with double throughbolts and 2 post lugs to receive torx® pin tamper-resistant security screws through both escutcheons. Alignment posts shall be located over and under the spindle for rigidity and security and shall project through the lock case to ensure proper alignment. Escutcheons to accept cast levers (Newport or Citation) which accept free-floating spindles with a torque resistance of 700 inch lbs. Size of spindle to be 5/16" (8mm) and extend from both sides of the escutcheon. Levers will remain attached if spindle is broken. Lobular torx® pin drive self-tapping screws and lobular throughbolts furnished standard for vandal resistance.

Locksets that are to be used on specified exterior doors or doors subject to special atmospheric conditions (roofs, pool areas, chemical laboratories, sewage disposal plants, etc.) shall have non-ferrous lock cases and critical internal components.

Locksets to be furnished standard with conventional 6-pin fixed core cylinders.

Optional cylinders shall include IC, Access 3, blackout, security and Pyramid. Furnish a tapered vandal-resistant cylinder collar where necessary.

Certification:  
UBC - 7 - 2 and UL10C - Positive Pressure  
Federal Specification FF-H-106G  
ANSI/BHMA A156.13 Series 1000, Grade 1  
ANSI/BHMA A117.1, Accessibility Code (formerly Title 19, California State Fire Marshal Standard) (lever handle trim).

All locks, trim, and cylinders shall be from one manufacturer.

All locksets shall carry a ten-year limited warranty.

### Mortise Locksets ML2000HS High Security Series Suggested Specification

All locksets shall be ML2000HS Series High-Security Mortise Locksets as manufactured by Corbin Russwin Architectural Hardware.

Locks shall be manufactured from heavy-gauge steel, minimum thickness 3/32" (2mm). Cases are to be closed on all sides to protect internal parts. Locks are to have adjustable, beveled and armored fronts, standard 2-3/4" (70mm) backset, a full 3/4" (19mm) throw two-piece mechanical anti-friction latchbolt, and a one-piece stainless steel 1" (25mm) throw deadbolt. Internal parts shall be heavy-gauge steel, zinc dichromate plated for corrosion resistance.

High-security trim shall be cast brass or bronze, designed to resist forcible removal. Knobs shall have 3/8" (10mm) spindles on both sides and shall be attached to the escutcheons. Escutcheons shall be 8-1/2" (216mm) x 1-3/4" (44mm) x 3/8" (10mm) thick, having a 30° chamfer at top and bottom to resist forcible removal. Locksets shall be furnished with 4 through bolts and 2 post lugs to receive security screws through both escutcheons. Alignment posts shall be located over and under the knob spindle for rigidity and security, and shall project through the lockcase to ensure proper alignment. Cylinders shall be mounted flush with the escutcheon. All exposed screws shall be security type.

Certification:  
UBC - 7 - 2 and UL10C - Positive Pressure  
Federal Specification FF-H-106G  
ANSI/BHMA A156.13 Series 1000, Grade 1  
ANSI/BHMA A117.1, Accessibility Code.

All locks, trim, and cylinders shall be from one manufacturer.

All locksets shall carry a ten-year limited warranty.

## ML20900 ECL Series Suggested Specification

### ECOFLEX™ ELECTRIFIED MORTISE LOCKS

#### A. CORBIN RUSSWIN ML20900

##### Electrified Mortise Locks

1. General: ANSI/BHMA certified extra heavy duty, lever type mortise lock conforming to ANSI/BHMA A156.13 Series 1000, Grade 1 requirements and ANSI A117.1 accessibility guidelines. All functions manufactured in a single sized case formed from a minimum 12 gauge steel. Lockset is field-adjustable for handing without opening the lock body with a beveled armored front that is 0.125" minimum thickness and utilizes a one piece 3/4" anti-friction stainless steel latchbolt. To insure proper alignment, all trim, shall be thru-bolted and fully interchangeable between rose and escutcheon designs. Lock is UL/CUL listed and labeled for use on up to 3 hour fire rated openings.
  - a. Backsets: 2-3/4".
  - b. Deadbolt: Optional 1" throw made of stainless steel and 2 hardened steel roller inserts.
  - c. Strikes: Provide wrought boxes and strikes with proper lip length to protect trim but not to project more than 1/8" beyond trim, frame or inactive leaf. Where required, provide open back strike and protected to allow practical and secure operation.
2. Provide access control mortise lock series, type and functions where specified in hardware groups, with provisions below:
  - a. Emergency override access capability with key cylinder retraction of lock latch bolt without necessary electronic activation.
  - b. Inside lever retracts latch and deadbolt simultaneously for free egress.
  - c. Refer to "KEYING" specification section for keying system requirements.
  - d. Lever and finish to match corresponding mechanical locking hardware.
3. Locking and unlocking of the lever handle by electronic operation contained completely within the body of the mortise lock.
  - a. Field configurable Fail Safe /Fail Secure by means of an external DIP switch setting.
  - b. Operationally voltage-insensitive 12 to 24 VDC.
  - c. Energy Performance: Maximum standby current required for functional operation not to exceed 50 mA at 24 VDC limiting potential inductive kickback or the need for external diodes.
  - d. Functional locking operation not affected by cable runs greater than 500 feet using a minimum 22 AWG wire.
4. Monitoring: Optional real time monitoring of latchbolt, deadbolt, door open/closed status and valid egress where specified. Valid egress signaled by activation of the Request-to-Exit (RX) micro switch integral to the inside lever of the lockset on the unsecure side of the door capable of shunting external alarms. Door open/closed status provided by monitoring the deadlatch and latchbolt in series with optional integrated magnetic door position switch.
5. Perform centralized control of the integrated locking functions by means of a single cable run to the access control panel independent of any proprietary power supplies, interface boards or controllers.
  - a. End of line termination points by means of factory pre-wired Molex® connectors and harnesses.
  - b. Source power electrical hard wiring and connections by others.

# Reversing Handing

## ML2000

### Instructions for reversing the hand of the ML2000.

Step 1) Move the Red locking screw to side of lock-body being locked (Fig. 1)





Step 2) Push in latch then depress catch plate with screw driver (Fig. 1)

Step 3) Pull latch out of lock-body and turn latch over (Fig. 2)


Step 4) Push in latch while holding screw driver behind latch tail (Fig. 3)

Note: Push in latch until catch plate is no longer depressed (Fig. 4)

Step 5) Rotate lock front to match level of door as shown (Fig. 5)

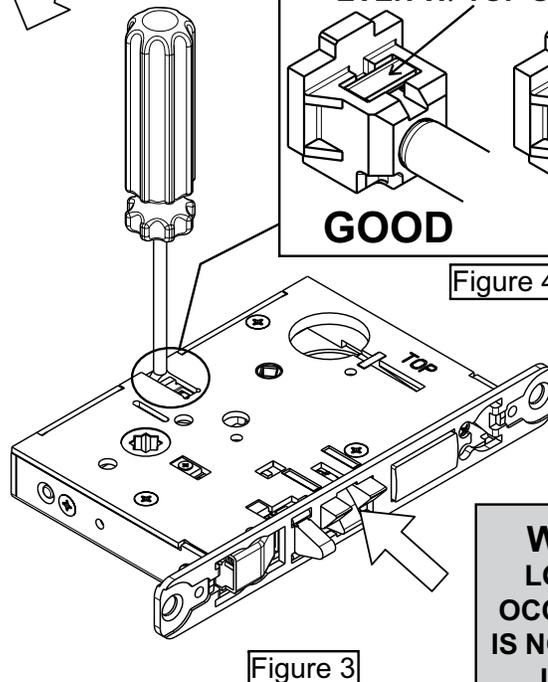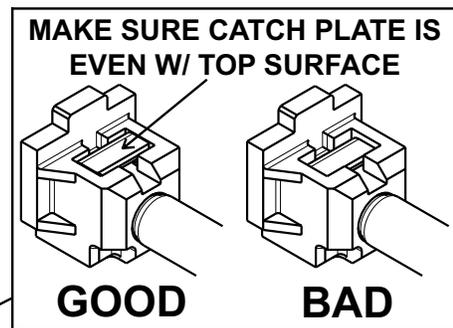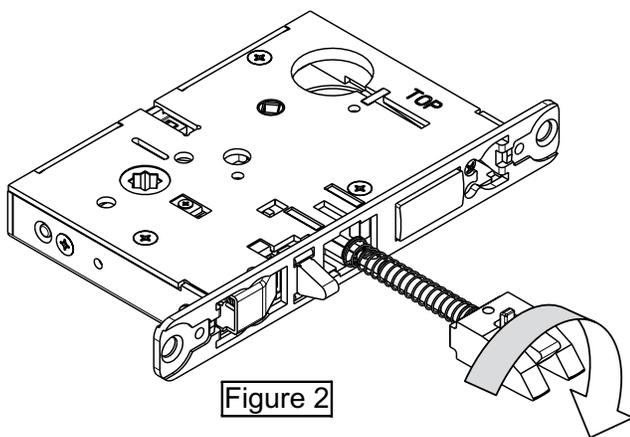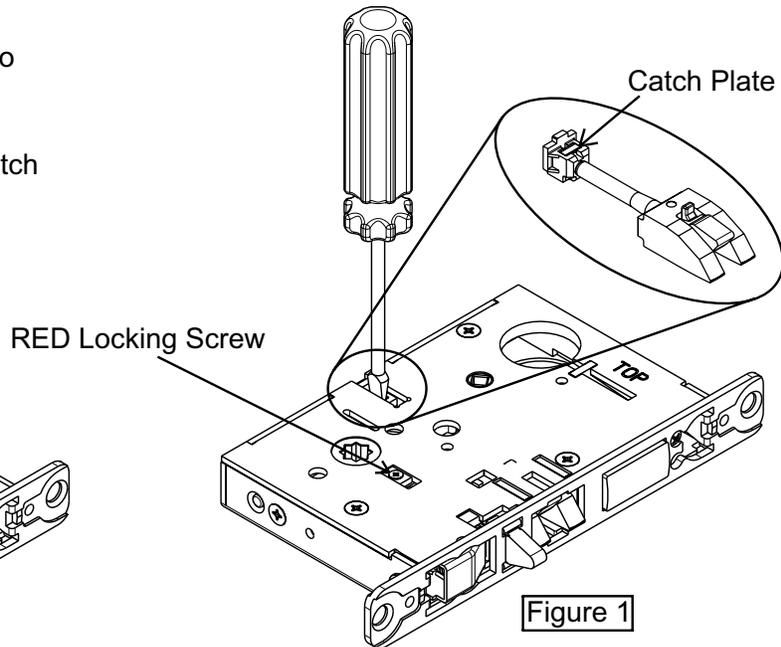

**WARNING:**  
LOCK-IN CAN  
OCCUR IF LATCH  
IS NOT PROPERLY  
INSTALLED

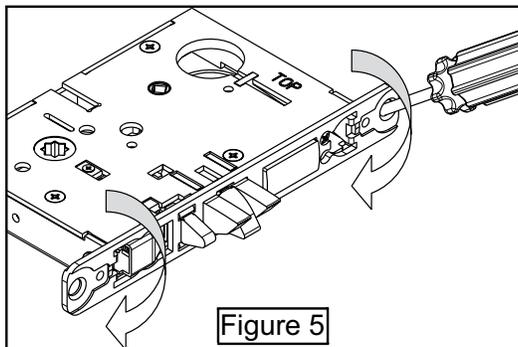

# Notes

ML2000

# Notes

ML2000

# Notes

ML2000

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience



**ASSA ABLOY**

**In U.S.**

Corbin Russwin  
Architectural Hardware  
225 Episcopal Road  
Berlin, CT 06037  
Phone: 800-543-3658  
Fax: 800-447-6714  
[www.corbinrusswin.com](http://www.corbinrusswin.com)

**In Canada**

ASSA ABLOY Door  
Security Solutions Canada  
160 Four Valley Drive  
Vaughan, Ontario  
Canada L4K 4T9  
Phone: 800-461-3007  
Fax: 905-738-2478  
[www.assaabloy.ca](http://www.assaabloy.ca)

For more information regarding Corbin Russwin Locksets, Exit Devices, Door Controls and Key Systems, contact your authorized Corbin Russwin Distributor or Sales Representative.



**MicroShield®**

As part of their promise to provide innovative solutions to their customers, certain ASSA ABLOY Group brands offer the MicroShield® technology, a silver-based antimicrobial coating designed to inhibit the growth of bacteria.

MicroShield® is a registered trademark of Yale Security Inc., an ASSA ABLOY Group company.



**ElectroLynx®**

As part of their promise to provide innovative, fast and effective high security solutions to their customers, certain ASSA ABLOY Group brands offer ElectroLynx®, a universal quick-connect system that simplifies the electrification of the door opening.

ElectroLynx® is a registered trademark of ASSA ABLOY Inc.

Corbin Russwin and Design®, Muséo®, Access 3® and Ecoflex® are registered trademarks of Corbin Russwin, Inc., an ASSA ABLOY Group company. Vineyard™ is a trademark of Corbin Russwin, Inc., an ASSA ABLOY Group company. Other products' brand names may be trademarks or registered trademarks of their respective owners and are mentioned for reference purposes only. These materials are protected under US copyright laws. All contents current at time of publication. Corbin Russwin, Inc., an ASSA ABLOY Group Company, reserves the right to change availability of any item in this catalog, its design, construction, and/or its materials. Copyright © 2001, 2015 Corbin Russwin, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin, Inc. is prohibited.