


ELECTRIFIED LATCH RETRACTION



MLRK1-DOR

(Formerly DLP-UL-M KIT)

- WORKS ON ALL DORMA 9000 SERIES DEVICES
- FAST, QUITE, SMOOTH & STRONG!
- INSTALLS UNDER THE PUSH PAD FOR THE ULTIMATE CUTDOWN DEVICE
- PATENT PENDING PUSH TO SET (PTS) TECHNOLOGY
- UL LISTED
- 3 YEAR “NO HASSLE” WARRANTY

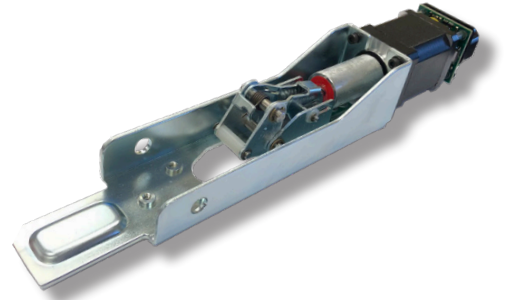

The **MLRK1-DOR** (DLP-UL-M-KIT) is a practical and cost-effective way to convert a mechanical Dorma series device to an electrified latch pullback device, while maintaining the UL listing. Our easy-to-install motor-driven kit installs in moments. It is equipped with PTS technology allowing for an easy post-installation adjustment of the latch/latches. Last but not least, the DLP features an updated MM4 module with 2 different energy consumption settings from energy conscious to high torque to get the tough jobs done!

SPECIFICATIONS

VOLTAGE RANGE – 24 TO 28 VDC

SYSTEM PROTECTION – UNIT SHUTDOWN WHEN VOLTAGE EXCEEDS 28VDC

STANDARD - AVERAGE CURRENT PEAK: 900MA,

AVERAGE CURRENT HOLD: 215MA

HIGH TORQUE - AVERAGE CURRENT PEAK: 2A,

AVERAGE CURRENT HOLD: 250MA

PTS ADJUSTMENT – APPROX. 1/4”

WIRE RUN:

300’ with 18ga wire

PRODUCT DETAILS:

Box: 10.5” x 3.75” x 2.5”

WEIGHT: 2 Lbs

15 MASTER PACK:

Weight: 30 ILbs 12.75” x 11.75” x 11”

CUTDOWN DETAILS:

36” - ALL THE WAY TO THE PUSH PAD

48” - ALL THE WAY TO THE PUSH PAD

ACCESSORIES

- Request to Exit (DRMREXKIT-ED) - Field Install

FEATURES

- Next Generation MM4 Smart Module: On board diagnostics with audible feedback for adjustment and power issues
- “PTS”: 5 second electronic adjustment for easy post installation adjustment
- Electric dogging rated for continuous duty - Auto re-engage if push pad is pulled from dogged position
- Low Current Draw - Field switchable to a “Low Current” or “High Torque” mode
- Up to 300’ wire run with 2-18ga wire - Long wire runs provides installer with convenience of placing the Command locking hardware power supply in a centralized location; i.e. the same closet as the access control panel
- 8’ cable with Quick Connect for MM4 module to easily connect to power supply lead
- Works on all Dorma 9000 series exit device

U.S. Customer Support
1-888-622-2377

Visit our website for more details
www.commandaccess.com

Canada Customer Support
1-855-823-3002

MLRK1-DOR MATRIX

The DOR KIT will work in new installations and as a replacement for installations with existing electrifications, matrix lists available options.

Dorma Kit	9000	Mechanical unmodified	CAT Modified Motor	Dorma Motor (-MLR)	SDC Motor (LR100-DAK)	ACSI Motor (1550K-MDD)
MLRK1-DOR	9000	✓	✓	✓	✓	✓

HOW TO ORDER

PART #	EASY ORDER #	DESCRIPTION
MLRK1-DOR (DLP-UL-M KIT)	72404	Retrofit field installable kit for Dorma 9000 series devices.

NEED LOCKING HARDWARE POWER SUPPLIES? WE'VE GOT A FEW RECOMMENDATIONS

- PS440B
- PS204/PS204B
- PS2
- PS480B
- PS210
- PS-4
- PS1
- PS220/220B
- PS5-8

